
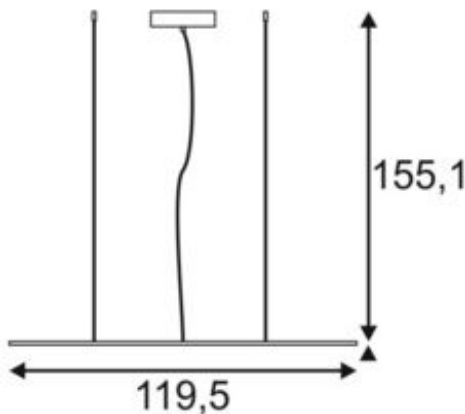


I-PENDANT PRO

pendant, LED, 4000K, square, silver-grey, 39W

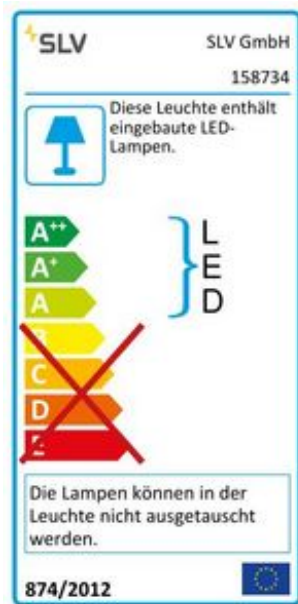

| | |
|---------------------------|------------------------------------|
| Article number | 158734 |
| Number of light sources | 1 |
| Max. wattage | 39 Watt |
| Lamp | SMD LED Module |
| Light distribution type 1 | Direct |
| Light distribution type 3 | rotationally symmetric |
| Product family | LED Panel |
| Feed-in capability | No |
| Lamp included | No |
| Length | 119.5 cm |
| Width | 29.5 cm |
| Height | 1.3 cm |
| Pendant length | 150 cm |
| Net weight | 4.389 kg |
| Gross weight | 5.515 kg |
| Voltage | 100-240 ~50/60 . 1000 Volts |
| Protection class | I |
| Beam angle | 110 Degree |
| Material | Aluminium/acrylic glass |
| Colour | silver |
| Way of mounting | Surface ceiling mounting (pendant) |
| Average lifespan | 30000 Hours |
| Colour temperature | 4000 Kelvin |
| Colour rendering index | 80 |
| Luminous flux | 3550 lm |
| Energy efficiency class | A++ |
| fastCalcEnabled | Yes |
| ranking | 300 |
| Catalogue page | BIG WHITE 2017: 134 |

The I-PENDANT PRO, available with a number of different light colours, offers a modern and space saving solution for efficient basic lighting needs. With a luminous flux of approx. 3200 lumens, you can achieve pleasant, even, and glare-free lighting ambience. The electrical connection is made via the built-in LED power supply directly to a 100-240V mains supply.

