

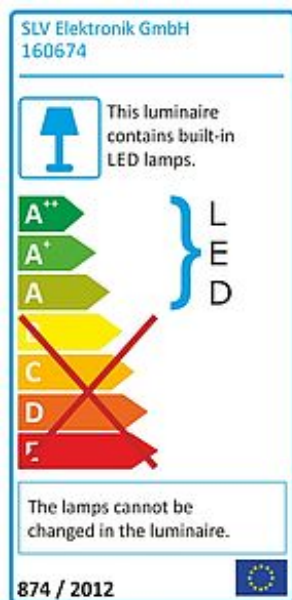


BOOST SQUARE IP44 downlight

silvergrey, 6W LED, 3000K

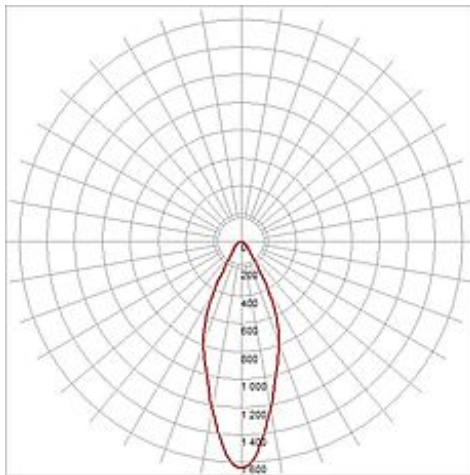

Article number	160674
Type of lamp	LED lamp
Lamp	planar LED 6W
Number of light sources	1
Lamp included	Yes
Installation diameter	8.2 cm
Installation depth	13.3 cm
Length	9.2 cm
Width	9.2 cm
Height	13.8 cm
Net weight	0.241 kg
Gross weight	0.349 kg
Max. wattage	6 Watt
Protection class	III
Beam angle	38 Degree
Material	aluminium
Colour	silvergrey
Way of mounting	recessed ceiling mounting
Remark 1	Operate with suitable 480mA drivers only
Remark 2	For recessed installation in ceilings with a maximum thickness of 25 mm
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Average lifespan	30000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	310 lm
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++
Light distribution type 1	direct

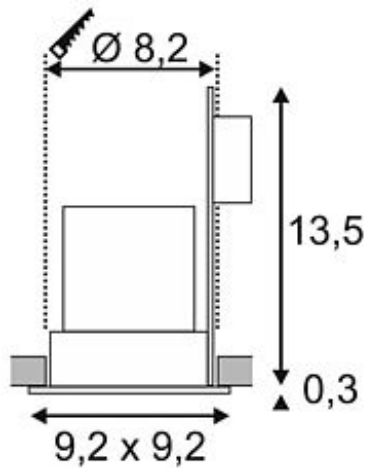

Light distribution rotationally symmetric
type 3

The rigid LED spotlight BOOST SQUARE IP44 is made from aluminum and the LED light solution for the exchange of performance intensive incandescent or halogen applications. The incorporated 6W Power LED with warm white light colour provides the necessary illumination intensity. Rated IP44 it can also be installed in damp areas. For operation of BOOST IP44, available in either white or silvergrey colour version, a suitable constant current driver providing 480mA is required. This luminaire contains built-in LED lamps. EEK: A - A++. The lamps cannot be changed in the luminaire.