



## PL-DL IP65 downlight

white, 2x TC-D Energy Saver, max. 2x 26W

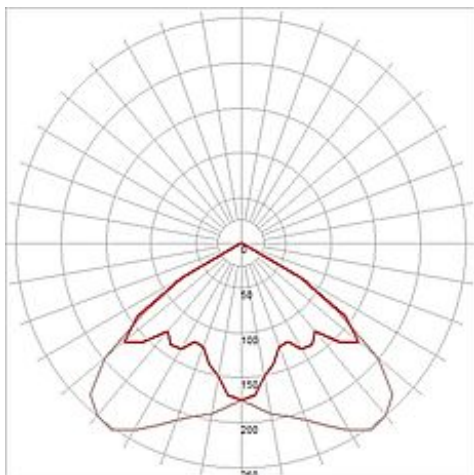

Article number	227226
Type of lamp	Conventional lamp
Lamp	TC-D compact fluorescent bulb 26W
Lampholder / Socket	G24d-3
Number of light sources	2
Lamp included	No
Installation diameter	18.5 cm
Installation depth	12 cm
Length	38 cm
Width	20.5 cm
Diameter	21.5 cm
Net weight	1.719 kg
Gross weight	3.405 kg
Voltage	230 Volt
Max. wattage	52 Watt
Protection class	II
Material	plastic
Colour	white
Way of mounting	recessed ceiling mounting
Remark 1	Conventional ballast incorporated
Remark 2	Only suitable for cavity ceilings with a thickness between 10 - 30 mm
Remark 3	Energy labels in your language are available in the Service Area sub point Download
Energy class ballast	B2
Suitable for lamps from EEC	B
Suitable for lamps up to EEC	B
Light distribution type 1	direct
Light distribution type 3	axisymmetric

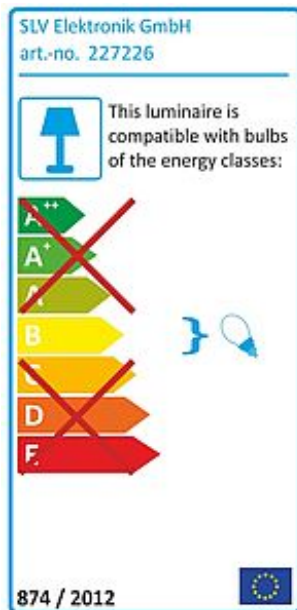

Recessed ceiling luminaire for cavity ceilings with a material thickness between 10 and 30 mm. Rated IP65, the fitting is suitable for outdoor use. The incorporated ballast, which supplies the two compact fluorescent lamps, allows the direct connection to 230V mains supply. This luminaire is compatible with bulbs of the energy classes: B - B