
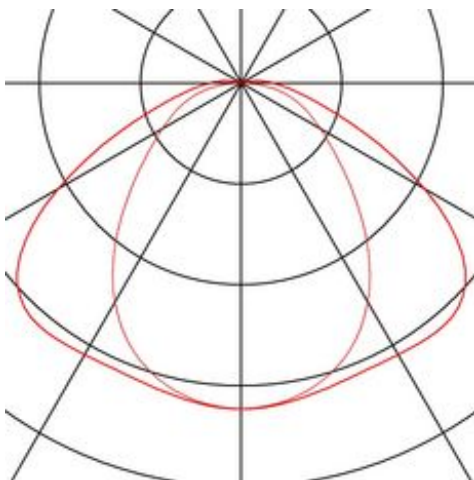


P-LIGHT

ceiling light, LED, 6000K, IP65, rectangular, white, 6,5W

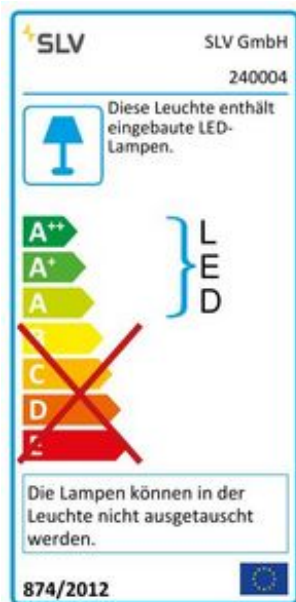

Article number	240004
Light distribution type 1	Direct
Product family	P-Light
Feed-in capability	No
Lamp included	No
Width	37.5 cm
Height	17.6 cm
Depth	7.3 cm
Net weight	1.293 kg
Gross weight	1.438 kg
Voltage	220-240 ~50 Volts
Protection class	II
IP-rating	IP 65
Beam angle	110 Degree
Material	Plastic PC
Colour	white
Way of mounting	Ceiling mounted / wall mounted
Average lifespan	25000 Hours
Colour temperature	6000 Kelvin
Colour rendering index	70
Luminous flux	100 lm
Energy efficiency class	A++
fastCalcEnabled	No
ranking	100
Catalogue page	BIG WHITE 2017: 724

P-LIGHT suitable for use as emergency lighting for surface-mounted wall and ceiling lights. The safety lights are fitted with two built-in Ni-MH batteries with an automatic self-test and detection range of 30m. The emergency operating time of the luminaires is three hours. The luminaires can be operated permanently switched on / stand-by operation. The electrical connection is directly to the 230V supply. Other variants of the P-LIGHT series are available.