

DEEP ADJUST

06-07-2015

1.0 LED111

LED 13W | 220-240V | 50-60Hz | AC-COB 3-step | phase-cut dim
 CE IP20 960°C 0,3m 38° 35°/35° 355°

white texture 112568W_
 black texture 112568B_

LIGHT COLOUR

2700K | >80CRI | 640lm 2
 3000K | >80CRI | 680lm 4

1.0 ES111

ES111 max. 75W | GU10 | 220-240V | VAC | 50-60Hz
 CE IP20 960°C 0,9m 35°/35° 355° DO NOT COVER

white texture 112520W0
 black texture 112520B0

OPTIONAL
 for ES111 lamps see our catalogue


1.0 QR11

QR111 max. 75W | G53 | 12V | excl. transformer
 CE IP20 960°C 0,9m 35°/35° 355° DO NOT COVER


white texture 112530W0
 black texture 112530B0

OPTIONAL
 for transformers see our catalogue

1.0 ES111

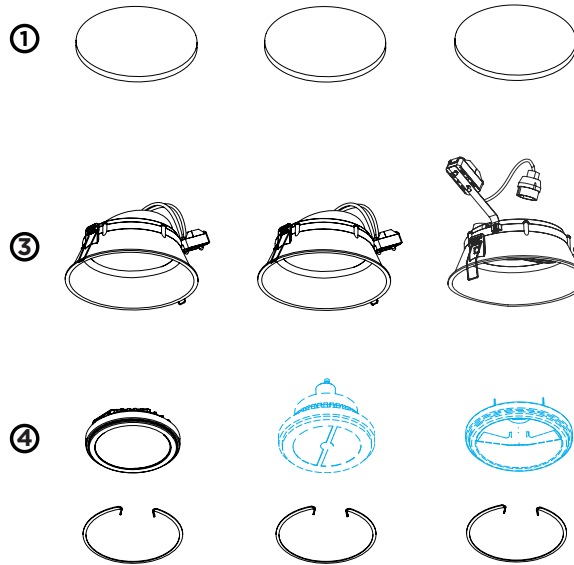

DIMENSIONS

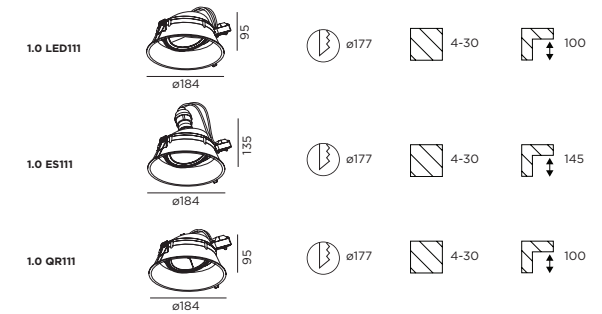

MOUNTING INSTRUCTION

- 1 Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

- 2 Connect the power supply.
 Interior: STANDARD version



- 3 Insert the fixture in the hole
- 4 Place the lamp and fix with inner part of DEEP

SAFETY DISTANCE FOR HALOGEN LAMPS



WEVER & DUCRÉ
 LIGHTING

www.weverducre.com

INSTALLATION
 INSTRUCTIONS