

DEEPER FIX IP20

30-May-2016

1.0 LED

LED 7/10W | 350-500mA | 18Vf | COB 3-step | excl. power supply

CE IP20 0.3m 36°

white texture	152161W_
silver / grey	152161S_
black texture	152161B_

LIGHT COLOUR

2700K >90CRI 420-590lm 18Vf	3
3000K >90CRI 470-640lm 18Vf	5
1800K-2850K >90CRI 320-440lm 18Vf	9

ALWAYS USE

for power supplies see our catalogue

1.0 MR16

QR-CBC51 Max. 50W | GU5.3 | 12V | excl. transformer

CE IP20 0.9m

white texture	152110W0
silver / grey	152110S0
black texture	152110B0

ALWAYS USE

for transformers see our catalogue

1.0 PAR16

Max. 35W | GU10 | 220-240VAC | 50-60Hz

CE IP20 0.9m

OPTIONAL: PAR16 LED GU10 6W | phase-cut dim : 2700K | 3000K | 1800-2850K

white texture	152120W0
silver / grey	152120S0
black texture	152120B0

②


1.0 LED

1.0 MR16

1.0 PAR16

④

①

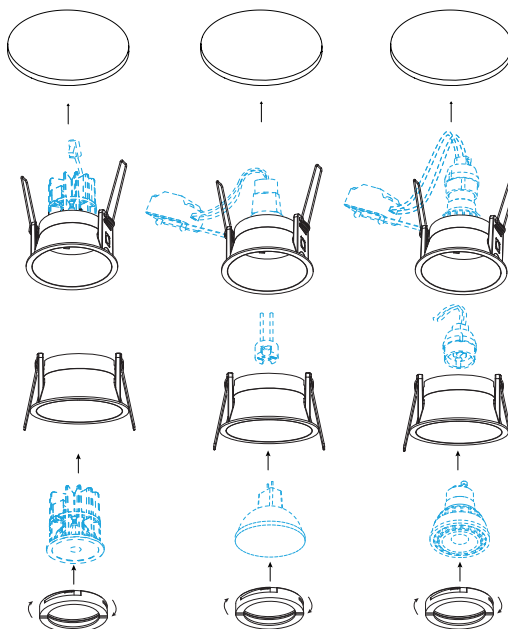

DIMENSIONS

1.0 LED



1.0 MR16



1.0 PAR16



MOUNTING INSTRUCTION

- Put the illuminant in the assembled cover.
- Make a hole in the ceiling according to the prescribed dimensions.
- POWER CONNECTION**

SERIAL CONNECTION - for LED

Always use **POWER SUPPLY** according to the specifications of the LED-module



PARALLEL CONNECTION - for PAR16



- Turn the springs and insert the fixture in the ceiling hole




FOR HALOGEN LAMPS:

1. The mounting height for the luminaire should be more than 2.5m.

2. Luminaires not suitable for covering with thermally insulating material.

3. Luminaires not suitable for direct mounting on normally flammable surfaces (suitable only for mounting on noncombustiblesurfaces)



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS