

JELI wall

20-Jan.-2017

1.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | phase-cut dim

CE $\oplus$ IP65 $\leq 0.3m$

3000K | >80CRI | 480lm

white texture

742163W4

black texture

742163B4

brown texture

742163Y4

2.0

LED 13W | 220-240VAC | 50-60Hz | PCB 3-step | phase-cut dim

CE $\oplus$ IP65 $\leq 0.3m$

3000K | >80CRI | 710lm

white texture

742143W4



black texture

742143B4


brown texture

742143Y4


dimensions base plate

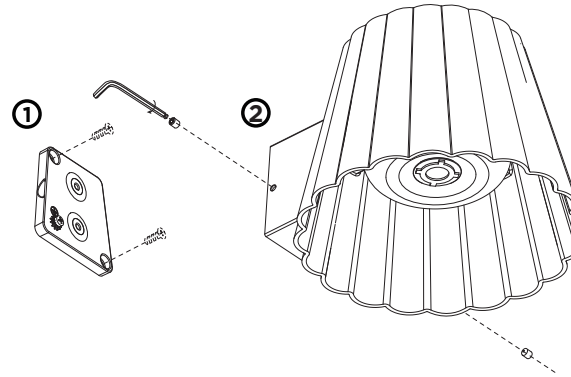

DIMENSIONS



JELI 1.0




JELI 2.0

MOUNTING INSTRUCTION

- 1 Remove the mounting base from the JELI and mount it on the wall with screws.

2 POWER CONNECTION

Connect the power supply connection: STANDARD version



- 3 Fixate the luminaire on the base with 2 allen screws.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²