

NOA

14-Jun.-2017

2.6

LED 6W | 220-240VAC | 50-60Hz | PCB 3-step | 2700K | >80CRI | 310lm

CE $\oplus$ IP20 $\text{C}_{0,3m}$ P E E E

incl. power supply	
white texture	204183W2
black texture	204183B2
incl. power supply phase-cut dim	
white texture	204184W2
black texture	204184B2

3.5

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | 2700K | >80CRI | 335lm

CE $\oplus$ IP20 $\text{C}_{0,3m}$ P E E E

incl. power supply	
white texture	204283W2
black texture	204283B2
incl. power supply phase-cut dim	
white texture	204284W2
black texture	204284B2


4.5

LED 10W | 220-240VAC | 50-60Hz | PCB 3-step | 2700K | >80CRI | 630lm


CE $\oplus$ IP20 $\text{C}_{0,3m}$ P E E E

incl. power supply	
white texture	204383W2
black texture	204383B2
incl. power supply phase-cut dim	
white texture	204384W2
black texture	204384B2


base plate dimensions

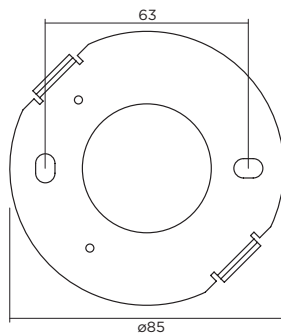

①
②
③

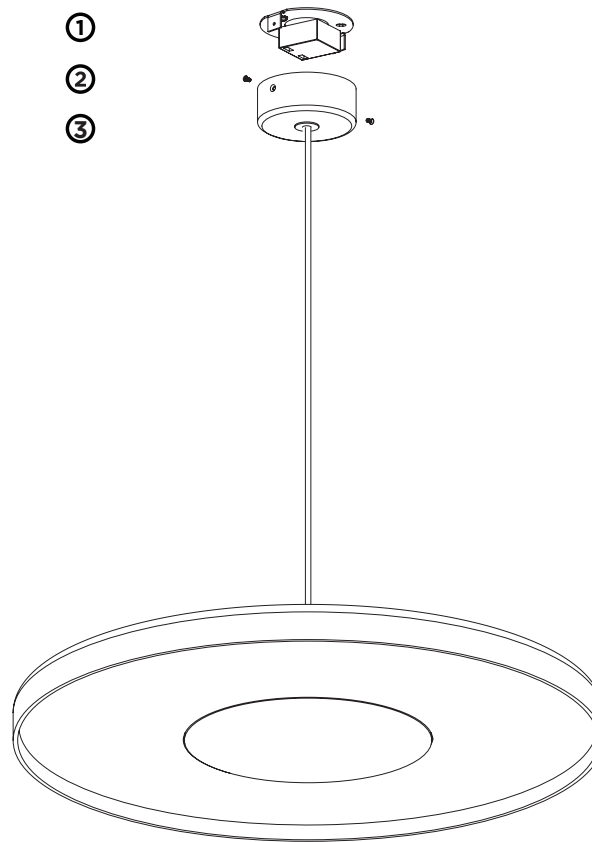

DIMENSIONS

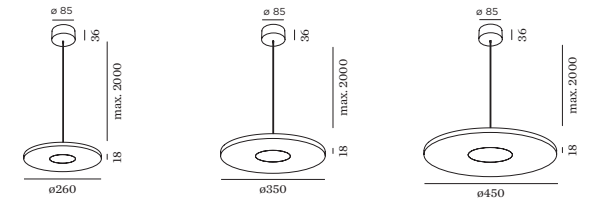


① MOUNTING INSTRUCTION

Remove the top cover.
Fixate the ceiling fixation plate to the ceiling with screws.

② POWER CONNECTION

Connect the power supply connection: STANDARD version



③ Close the top cover.