

PACE

29-07-2015

4.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim
 CE $\oplus$ IP65 $\square$ 960°C $\square$ 0.3m $\square$ G $\square$

3000K | >80CRI | 480lm
 white texture
 dark grey texture

723174W4
 723174D4

OPTIONAL
 groundspike

90013102

6.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim
 CE $\oplus$ IP65 $\square$ 960°C $\square$ 0.3m $\square$ G $\square$

3000K | >80CRI | 480lm
 white texture
 dark grey texture

723274W4
 723274D4

OPTIONAL
 groundspike

90013102

8.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim
 CE $\oplus$ IP65 $\square$ 960°C $\square$ 0.3m $\square$ G $\square$


3000K | >80CRI | 480lm
 white texture
 dark grey texture

723374W4
 723374D4


OPTIONAL
 groundspike

90013102



mounting plate dimensions




groundspike dimensions



No need to open the box
 during installation
 Product is already - pre cabled

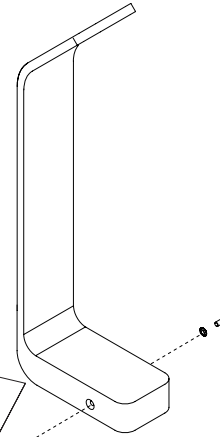


④



②

DIMENSIONS

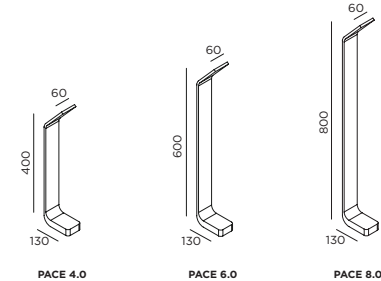


MOUNTING INSTRUCTION

- ① Remove the mounting plate
- ② Fix the mounting plate on the ground with screws or mount on the groundspike

POWER CONNECTION

- ③ Connect the wires with the waterproof connections



- ④ Fix the housing on the mounting plate