

PALLUZ C

2-11-2015

1.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE $\oplus$ IP65 960°C 10.3m P $\blacksquare$

3000K | >85CRI | 665lm | opal glass
dark grey texture

724374D4

ALWAYS USE

base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation base 230 910032D0

OPTIONAL, (ORDER SEPARATELY)

ground spike for invisible base 230 90013104
ground fixation for base 230 | 600 | 800 90013303

2.0

LED 8W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE $\oplus$ IP65 960°C 10.3m P $\blacksquare$

3000K | >85CRI | 720lm | clear glass
dark grey texture

724474D4


ALWAYS USE

base 230 910033D0
base 600 910036D0
base 800 910038D0
invisible fixation base 230 910032D0


OPTIONAL, (ORDER SEPARATELY)

ground spike for invisible base 230 90013104
ground fixation for base 230 | 600 | 800 90013303


base plate dimensions

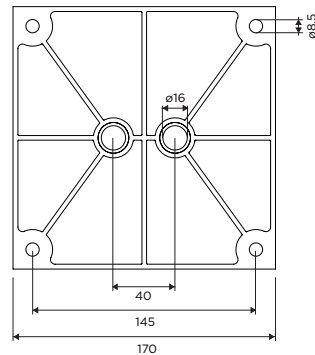

invisible fixation dimensions



⑤

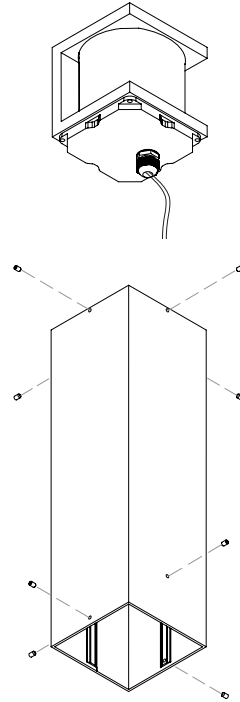


③

②


* DO NOT COVER BASE (moss, bark, ...).
Permanent moisture & possible chemical processes from eg.
fertilization might lead in some combinations to a corrosive reaction.

DIMENSIONS

PALLUZ C 1.0



PALLUZ C 2.0




MOUNTING INSTRUCTION

- ① Remove the lower part of the base*
- ② Fixate the lower part on the ground with screws
- ③ Fixate the base to the lower part

POWER CONNECTION

- ④ Connect the wires with the waterproof connections



- ⑤ Attach the head of the fixture on the base



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS