

PALOS

08-04-2015

1.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE $\oplus$ IP65 $\square$ 960° C $\downarrow$ 0,3m $\oplus$ $\square$

3000K | >80CRI | 480lm

white texture
dark grey texture

716174W4
716174D4

2.0

LED 2x8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim


CE $\oplus$ IP65 $\square$ 960° C $\downarrow$ 0,3m $\oplus$ $\square$

3000K | >80CRI | 2x480lm


white texture
dark grey texture

716274W4
716274D4


back plate dimensions

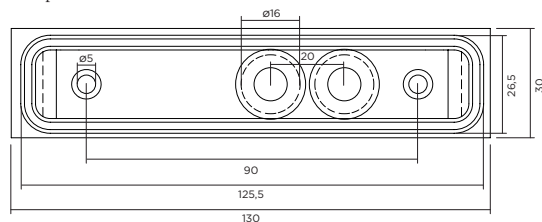


PALOS 1.0

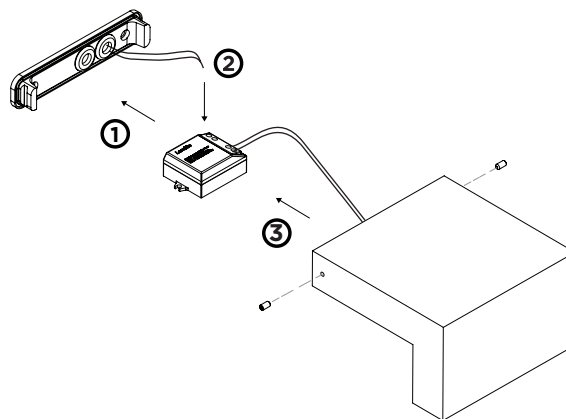

PALOS 2.0

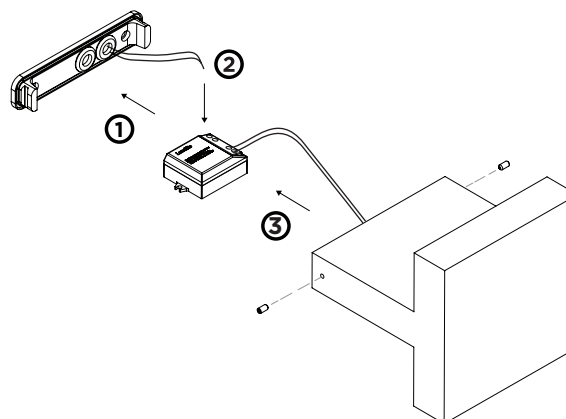

DIMENSIONS

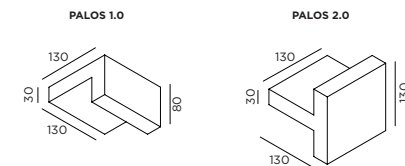


MOUNTING INSTRUCTION

- 1 Remove the back plate and fixate to the wall with screws

POWER CONNECTION

- 2 Connect the wires with the waterproof connections



- 3 Mount the PALOS on the back plate



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

**INSTALLATION
INSTRUCTIONS**