

PLUXO

10-06-2015

4.0 LED111

LED 4x13W | 220-240V | 50-60Hz | AC-COB 3-step | phase-cut dim

CE IP20 960° C 0.3m P 38° 45°/45° 45°/45°

white texture
silver / grey
black texture




143468W_
143468S_
143468B_

OPTIONAL


2700K | >80CRI | 640lm
3000K | >80CRI | 680lm

2
4

ceiling base dimensions

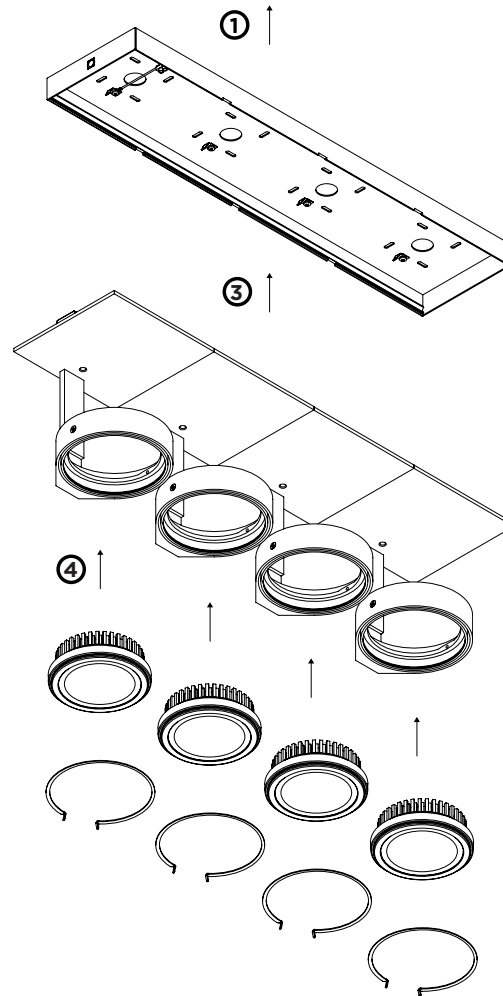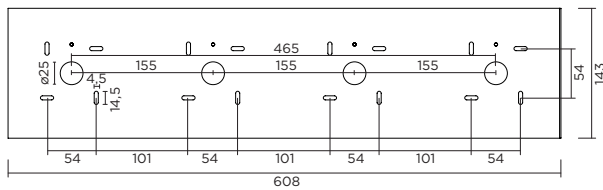

DIMENSIONS

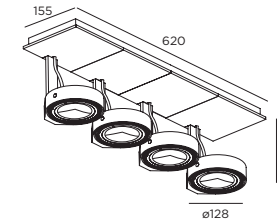


MOUNTING INSTRUCTION

- 1 Mount the ceiling base to the ceiling with screws

POWER CONNECTION

- 2 Connect per PLUXO fixture the earthing wire to the slider on the ceiling base.

PARALLEL CONNECTION

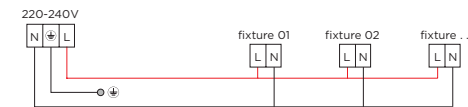

Connect the LED modules

Short cables and connectors for through wiring are included.

- 3 Click the PLUXO on the ceiling base
- 4 Insert the lamp in lamping and fix with spring



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS