

PYRAMID

06-07-2015

1.0 LED111

LED 13W | 220-240V | 50-60Hz | AC-COB 3-step | phase-cut dim

CE IP20 960°C 0,9m 38° 35°/35° 355°

white texture

113368W

LIGHT COLOUR

2700K | >80CRI | 640lm

2

3000K | >80CRI | 680lm

4

1.0 ES111

ES111 max. 75W | GU10 | 220-240V | VAC | 50-60Hz

CE IP20 960°C 0,9m 35°/35° 355° ~~75W~~ DO NOT COVER

white texture

113320W0

OPTIONAL

for ES111 lamps see our catalogue

1.0 QR111

QR111 max. 75W | G53 | 12V | excl. transformer

CE IP20 960°C 0,9m 35°/35° 355° ~~75W~~ DO NOT COVER

white texture



113330W0

OPTIONAL


for transformers see our catalogue

bottom view


side view




①



③



④

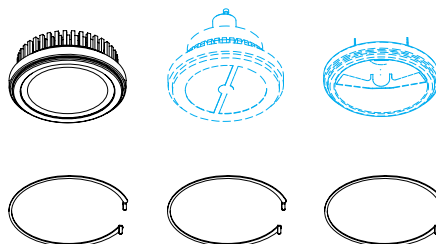


DIMENSIONS

1.0 LED111



1.0 ES111



1.0 QR111




MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

- ② PARALLEL CONNECTION - for LED111 | ES111




PARALLEL CONNECTION - for QR111

Always use 12V TRANSFORMER



- ③ Insert the fixture in the hole
- ④ Place the LED engine, ES111 or QR111 lamps and fix with spring

SAFETY DISTANCE FOR HALOGEN LAMPS



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS