

RAY

21-09-2015

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE $\oplus$ IP20 $\square$ 960°C $\square$ 0.3m $\square$ 36° $\oplus$ $\square$

2.0

200mm

white texture
aluminium brushed
copper
black texture

207764W_
207764L_
207764P_
207764B_

3.0

300mm

white texture
aluminium brushed
copper
black texture

207864W_
207864L_
207864P_
207864B_

LIGHT COLOUR

2200K | >80CRI | 380lm
2700K | >80CRI | 480lm
3000K | >80CRI | 480lm

1
2
4

2.0 | 3.0 PAR16

max. 35W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE $\oplus$ IP20 $\square$ 960°C $\square$ 0.3m $\square$ 36° $\oplus$ $\square$

2.0

200mm

white texture
aluminium brushed
copper
black texture

207720W0
207720L0
207720P0
207720B0

3.0


300mm

white texture
aluminium brushed
copper
black texture


207820W0
207820L0
207820P0
207820B0

OPTIONAL

for PAR16 lamps see our catalogue

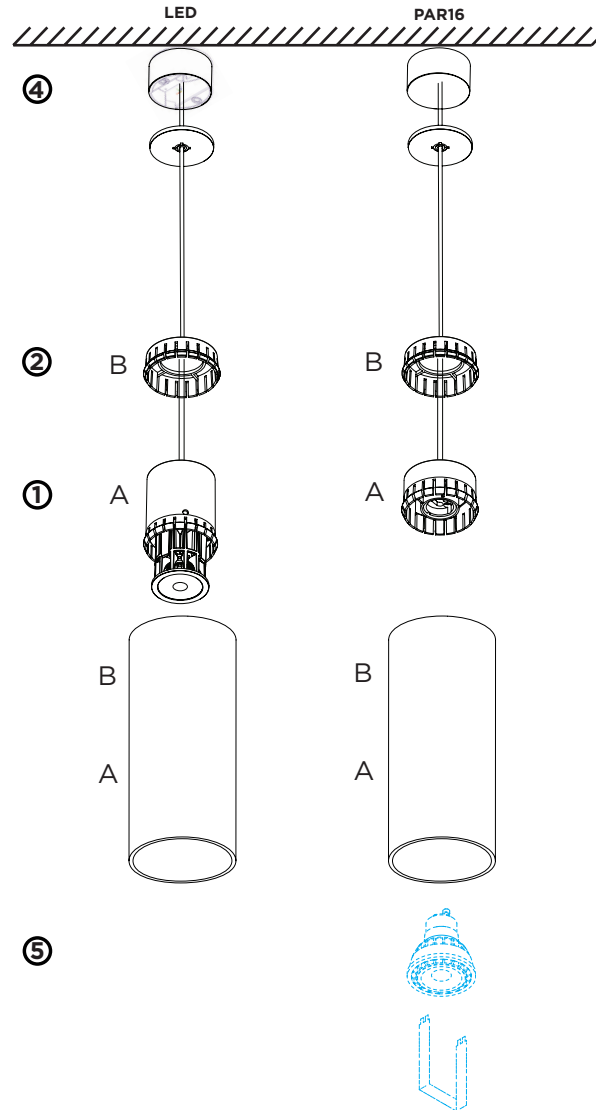

DIMENSIONS




MOUNTING INSTRUCTION

- 1 Insert part A until it clicks in the lower part of the cover
- 2 Insert part B until it clicks in the higher part of the cover

3 POWER CONNECTION

Connect wiring to the power supply (for LED)
or to terminal block (for PAR16)

PARALLEL CONNECTION



- 4 Mount the ceiling base on the ceiling
- 5 ONLY FOR PAR16
Insert the lamp with the tool



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS