

SMILE

03-06-2015

1.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE $\oplus$ IP65 $\square$ 960°C $\square$ 0,3m $\square$ $\square$ $\square$

3000K | >80CRI | 480lm

white texture
aluminium brushed (only for interior use)
dark grey texture (only for exterior use)

703354W4
703354L4
703354D4

2.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim


CE $\oplus$ IP65 $\square$ 960°C $\square$ 0,3m $\square$ $\square$ $\square$

3000K | >80CRI | 480lm


white texture
aluminium brushed (only for interior use)
dark grey texture (only for exterior use)

703454W4
703454L4
703454D4


back plate dimensions

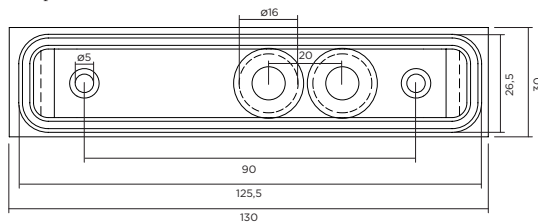


SMILE 1.0

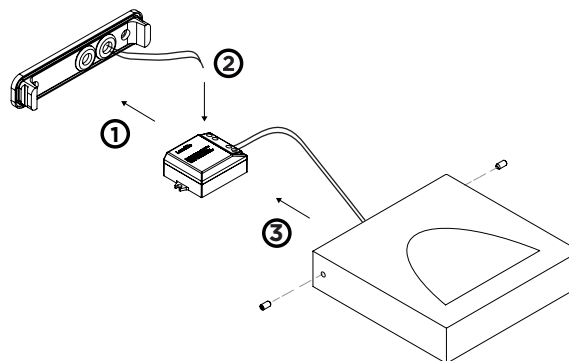

SMILE 2.0

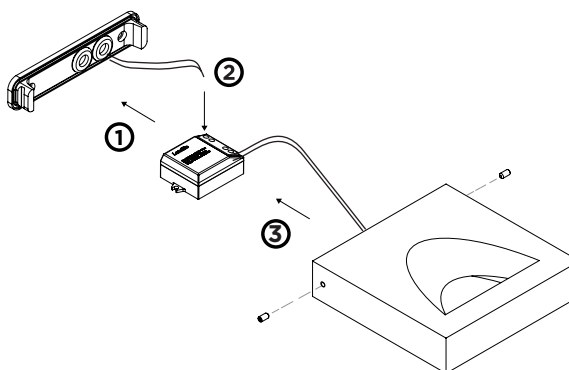

DIMENSIONS

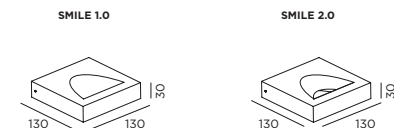


MOUNTING INSTRUCTION

- 1 Remove the back plate and fixate to the wall with screws

POWER CONNECTION

- 2 Use connector or cut wires to connect to power supply

Interior: STANDARD version



Exterior: WATERPROOF Connection



- 3 Mount the SMILE on the back plate



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS