

SPINO

02-06-2017

1.0 MR16

QR-CB51 max. 35W | GU5.3 | 12V | excl. transformer

CE IP20 960°C 0,9m 45°/45° 355° DO NOT COVER

white
matte chrome

122110H0
122110M0

ALWAYS USE

for transformers see our catalogue

1.0 PAR16

PAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 960°C 0,9m 45°/45° 355° DO NOT COVER

white
matte chrome

122110H0
122110M0



OPTIONAL

for PAR16 lamps see our catalogue





MR16

PAR16


①



③

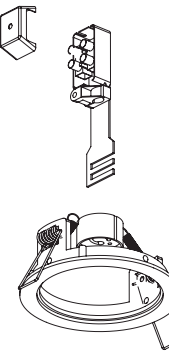

DIMENSIONS

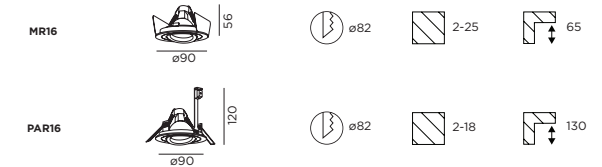


MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

- ② PARALLEL CONNECTION - for PAR16




PARALLEL CONNECTION - for MR16

Always use 12V TRANSFORMER



- ③ Insert the fixture in the hole.

SAFETY DISTANCE FOR HALOGEN LAMPS



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS