

STAKE

11-07-2016

1.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim
 CE IP54 960°C 0,3m 0-120°

3000K | >80CRI | 480lm | 1m cable
 dark grey texture

727174D4

OPTIONAL
 groundspike
 snoot

90013106
 90019004

2.0

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim
 CE IP54 960°C 0,3m 0-120°

3000K | >80CRI | 480lm
 dark grey texture

727374D4

ALWAYS USE

base 200
 base 400

910042D0
 910044D0


OPTIONAL
 groundspike
 snoot

90013107
 90019004


OPTIONAL, (ORDER SEPARATELY)
 snoot dimensions




OPTIONAL, (ORDER SEPARATELY)
 STAKE 1.0 - groundspike dimensions




OPTIONAL, (ORDER SEPARATELY)
 STAKE 2.0 - groundspike dimensions




base 400 dimensions




base 200 dimensions



STAKE 1.0



Base plate not
 needed when using
 a groundspike





* DO NOT COVER BASE (moss, bark, ...).
 Permanent moisture & possible chemical processes from eg.
 fertilization might lead in some combinations to a corrosive reaction.

① ↓



STAKE 2.0

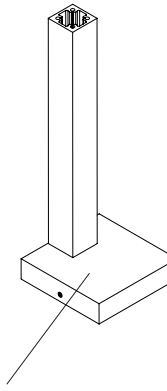


① ↓




DIMENSIONS

STAKE 1.0



STAKE 2.0




MOUNTING INSTRUCTION

- ① Fix the base plate or base on the ground by using the screws. In case of use with an optional groundspike or on a base, remove the base plate with the side screws and fix directly on the previewed place on the groundspike or base.

POWER CONNECTION

- ② Exterior: WATERPROOF Connection



- ③ Attach the STAKE to the base

- ④ OPTIONAL : click the snoot on the STAKE



WEVER & DUCRÉ
 LIGHTING

www.weverducre.com

**INSTALLATION
 INSTRUCTIONS**