

TUBE

27-Oct.-2016

1.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE $\oplus$ IP65 $\square$ 960° C $\downarrow$ 0.9m $\angle$ 38° $\odot$ $\blacksquare$ $\blacksquare$ $\blacksquare$

3000K | >80CRI | 480lm

white texture
dark grey texture
black texture

711164W4
711164D4
711164B4

1.0 PAR16


PAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE $\oplus$ IP65 $\square$ 960° C $\downarrow$ 0.9m $\odot$ $\blacksquare$ $\blacksquare$ $\blacksquare$


white texture
dark grey texture
black texture

711120W0
711120D0
711120B0



OPTIONAL
for PAR16 lamps see our catalogue

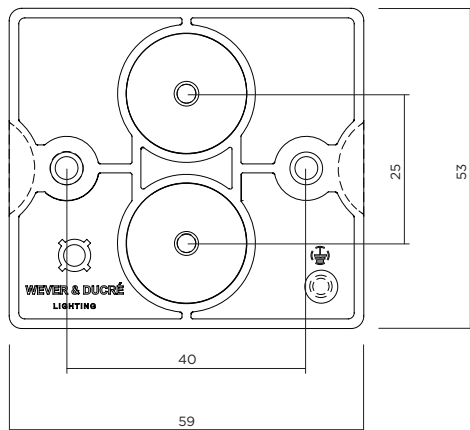

1.0 LED



1.0 PAR16

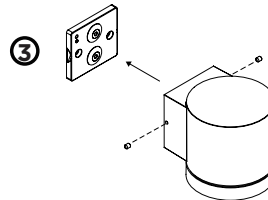

4



DIMENSIONS



1.0 LED



1.0 PAR16


MOUNTING INSTRUCTION

- 1 Remove the backplate and fixate it to the wall with screws.

POWER CONNECTION

- 2 Exterior: WATERPROOF Connection

IP-rated connections for wall fixtures: cable isolation for round cables $\varnothing$ 4.5-7.5 mm, should be in the grommet. For cable use $\varnothing$ 7.0-9.5 mm: replace the grommet with the other grommet in the bag.

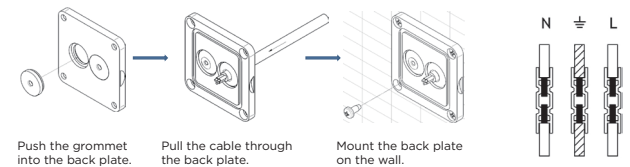

- 3 Fixate the fixture base to the back plate with side screws

- 4 For PAR16:
Remove the glass cover by turning it.
Insert the lamp.
Turn the glass cover back on the fixture.