






BLAS

EXTERIOR
CEILING SURFACE

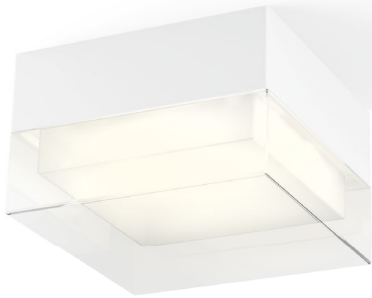

1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1 kg IP65 0.3

3000K | >80 CRI | 640lm

	CODE
	736187W4
	736187D4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.3 kg IP65 0.3

3000K | >80 CRI | 640lm

	CODE
	736287W4
	736287D4