



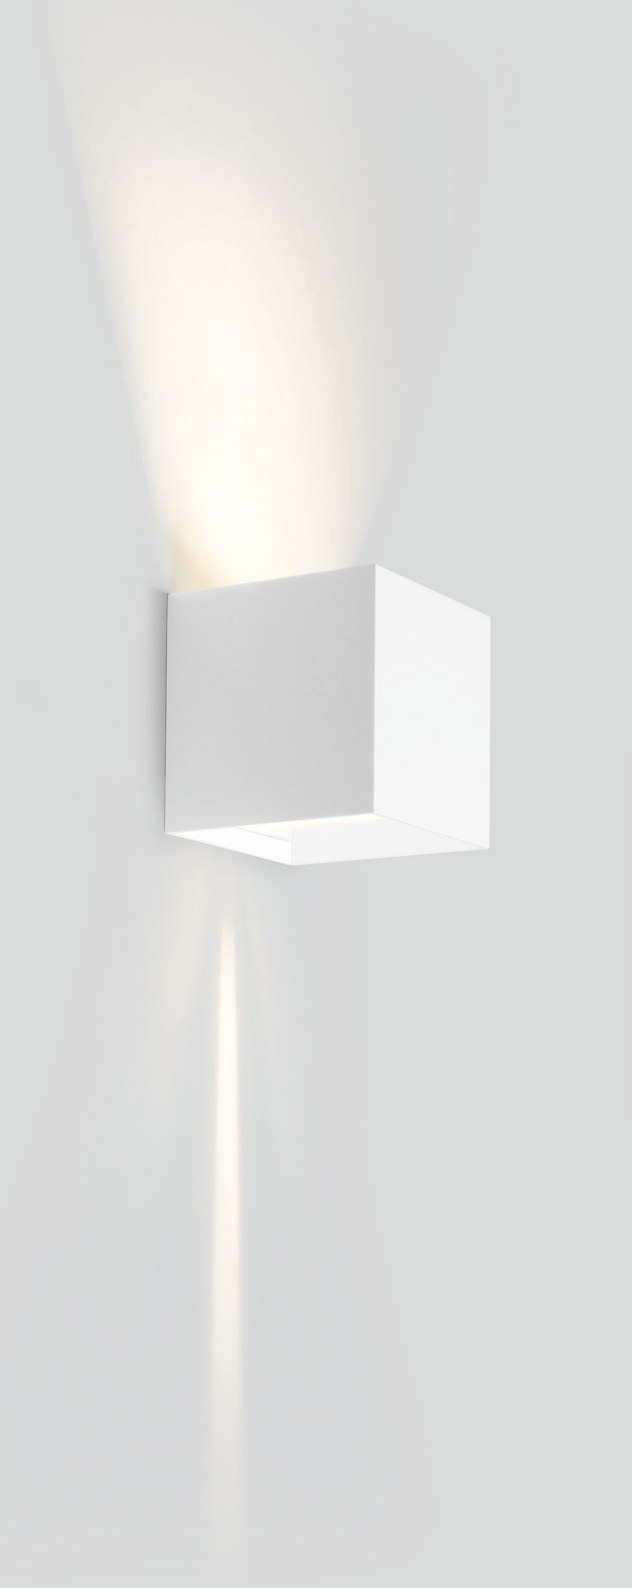

BOX
EXTERIOR
WALL SURFACE



1.0


LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.60kg IP65 0.3°

CODE		
	740168W	
	740168D	
	740168B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



2.0


2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.66kg IP65 0.3°

CODE		
	740148W	
	740148D	
	740148B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4



3.0


LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.67kg IP65 0.3°

CODE		
	740268W	
	740268D	
	740268B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



4.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.86kg IP65 0.3°

CODE		
	740248W	
	740248D	
	740248B	

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4