




ROB  
CEILING SURFACE

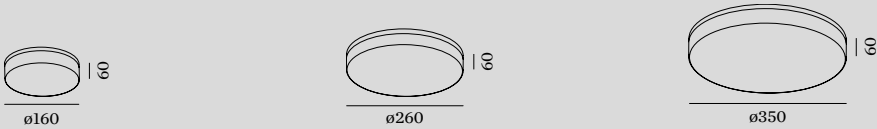

1.6

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
opal PMMA cover

0.70kg IP44

3000K | >80 CRI | 850lm

|  |          |
|--|----------|
|  | CODE     |
|  | 701184W4 |
|  | 701184S4 |

OPTIONAL

dimmer

|              |          |
|--------------|----------|
|              | CODE     |
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 540

2.6

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
opal PMMA cover

1.20kg IP44

3000K | >80 CRI | 1400lm

|  |          |
|--|----------|
|  | CODE     |
|  | 701284W4 |
|  | 701284S4 |

OPTIONAL

dimmer

|              |          |
|--------------|----------|
|              | CODE     |
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 540

3.5

LED 26W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
opal PMMA cover

1.90kg IP44

3000K | >80 CRI | 2700lm

|  |          |
|--|----------|
|  | CODE     |
|  | 701384W4 |
|  | 701384S4 |

OPTIONAL

dimmer

|              |          |
|--------------|----------|
|              | CODE     |
| for switch   | 90019017 |
| for din rail | 90019018 |

more specs on page 540