

ATIM

06-07-2016

1.0 LED

LED 6W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase-cut dim

CE IP65 960°C 0,3m 10

3000K | >80CRI | 380lm


inox

71018414


OPTIONAL

louvre

90019106

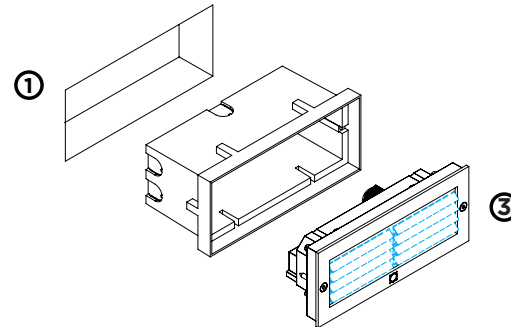

DIMENSIONS




MOUNTING INSTRUCTION

- 1 Make a hole in the ceiling according to the prescribed dimensions.

POWER CONNECTION

- 2 Connect

Exterior: WATERPROOF Connection



- 3 Insert the fixture in the hole

Installation with a border of 8mm



Make an opening:
193x82mm
depth = 87mm



Make the necessary
openings for the
wires in the recessed
box.



Install the recessed box flush with the
finished wall. The mounting frame comes
8mm out of the recessed box and keeps the
4 sides flat during fixation



Take out the mounting frame, fix the
housing on the recessed box, tempered
glass and close the cover with the 4
stainless steel screws.

Trimless installation



Make an opening:
193x82mm
depth = 95mm



Make the necessary
openings for the
wires in the recessed
box.



Install the mounting frame, which has to be
inserted into the recessed box, flush with the
finished wall.



Take out the mounting frame, fix the
housing on the recessed box, tempered
glass and close the cover with the 4
stainless steel screws.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

**INSTALLATION
INSTRUCTIONS**