

SLALOM

02-06-2017

1.0 MR16

QR-CB51 max. 35W | GU5.3 | 12V | excl. transformer

CE IP20 960°C 0,9m DO NOT COVER

white
matte chrome

121110H0
121110M0

ALWAYS USE

for transformers see our catalogue

1.0 PAR16

PAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 960°C 0,9m DO NOT COVER

white
matte chrome


121120H0
121120M0

OPTIONAL

for PAR16 lamps see our catalogue

1.0 MR16

①



③




④



1.0 PAR16


①




③



④



DIMENSIONS

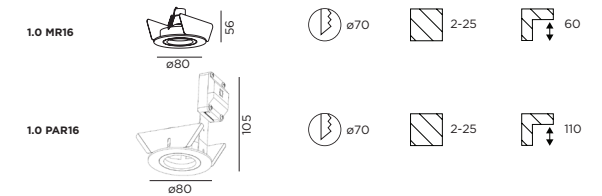


MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.


POWER CONNECTION

- ② PARALLEL CONNECTION - for PAR16




PARALLEL CONNECTION - for MR16

Always use TRANSFORMER



- ③ Connect lamp to the socket
- ④ Insert inner ring under angle to fix the lamp

SAFETY DISTANCE FOR HALOGEN LAMPS



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS