

TRAIN NARROW

08-Dec.- 2015

1.0 NARROW

LED 6W | 220-240VAC | 50-60Hz | incl.power supply

CE IP65 960°C 0,3m

3000K | >80CRI | 160lm

dark grey texture

719143D4

2.0 NARROW UP DOWN

LED 2x3W | 220-240VAC | 50-60Hz | incl.power supply

CE IP65 960°C 0,3m

3000K | >80CRI | 2x100lm

dark grey texture

719243D4

2.0 NARROW UP FLOOD DOWN

LED 2x3W | 220-240VAC | 50-60Hz | incl.power supply


CE IP65 960°C 0,3m

3000K | >80CRI | N: 80lm / F: 250lm



dark grey texture

719253D4


TRAIN 1.0 - wall base dimensions




TRAIN 2.0 - wall base dimensions

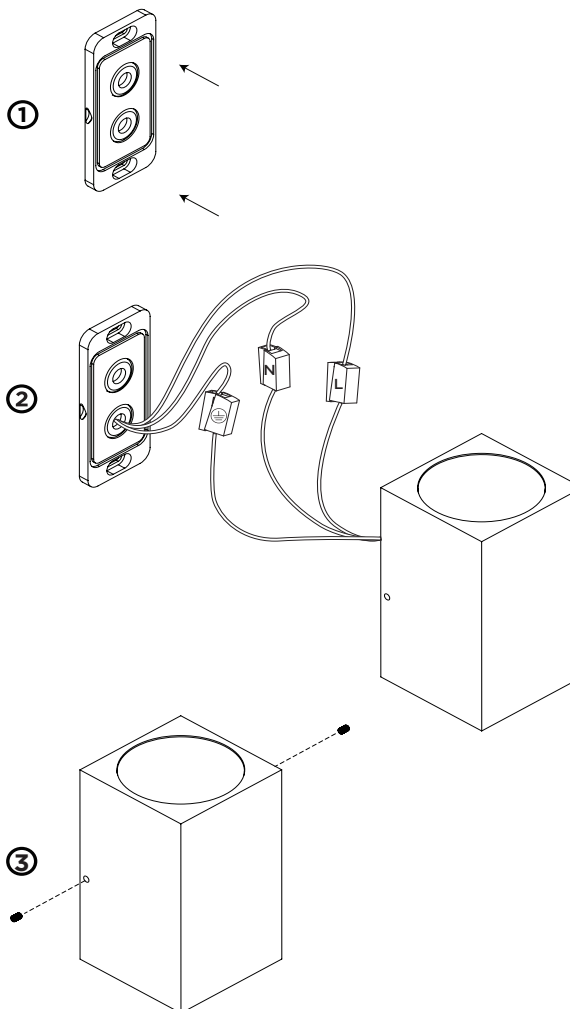


DIMENSIONS



TRAIN 1.0
NARROW



TRAIN 2.0
NARROW UP DOWN



TRAIN 2.0
NARROW UP FLOOD DOWN


MOUNTING INSTRUCTION

- 1 Attach the wall base on the wall with screws


POWER CONNECTION

- 2 Make connection with the power supply

Interior: STANDARD version



IP-rated connections for wall fixtures: cable isolation for round cables \varnothing 4.5-7.5 mm, should be in the grommet. For cable use \varnothing 7.0-9.5 mm: replace the grommet with the other grommet in the bag.

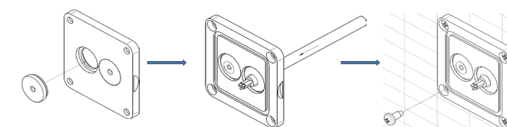

Push the grommet into the back plate.

Pull the cable through the back plate.

Mount the back plate on the wall.

- 3 Attach the TRAIN on the wall base with the side screws



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS