

WETRO 1.0/2.0/3.0

26-Apr.-2017

1.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS

CE IP20 0,3m

1800-2850K | >80CRI | 400lm

black smoked
copper plated

233189B9
233189P9

2.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS

CE IP20 0,3m

1800-2850K | >80CRI | 400lm

black smoked
copper plated

233289B9
233289P9

3.0

LED 8W | 220-240VAC | PCB 3-step | ambient white dim | Phase-cut dim | incl.PS


CE IP20 0,3m

1800-2850K | >80CRI | 400lm


black smoked
copper plated

233389B9
233389P9

always use single ceiling base, see our catalogue
optional multi ceiling bases, see our catalogue

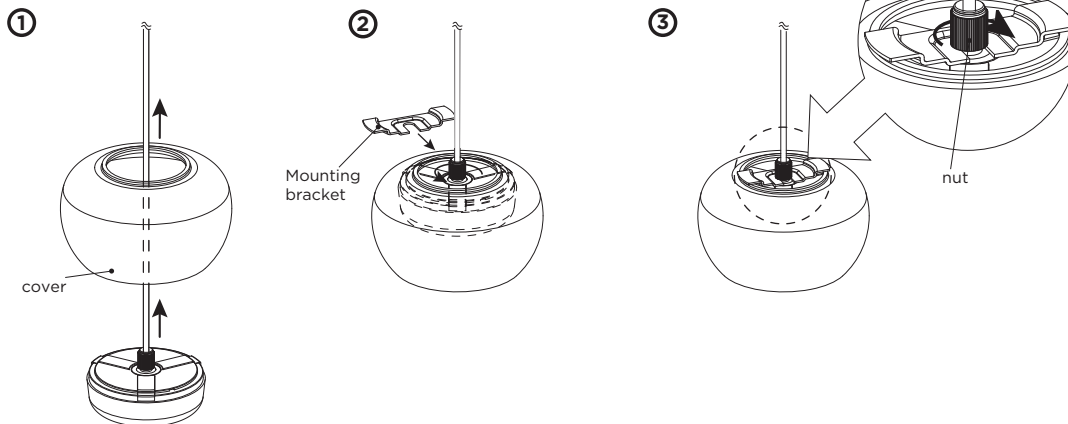

DIMENSIONS

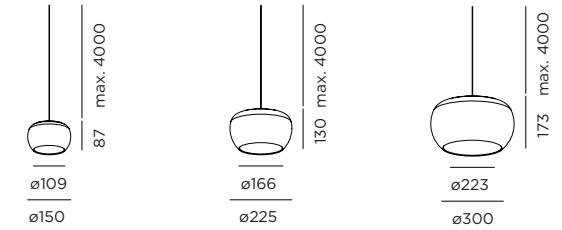

WETRO 1.0

WETRO 2.0

WETRO 3.0

MOUNTING INSTRUCTION

- ① Pass the cable of the LED module through the hole at the bottom of the glass cover.
- ② Unscrew the nut and then insert the mounting bracket under the nut.
- ③ Screw tighten the nut.

④ POWER CONNECTION

Connect the power supply
connection: STANDARD version



- ⑤ Attach the cable to the hook according to the prescribed steps.

The light source of the integrated LED is not replaceable;
When the light source reaches its end of life the whole
luminaire shall be replaced.



Caution, risk of electric shock



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS