
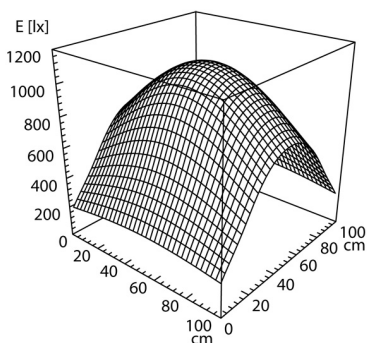
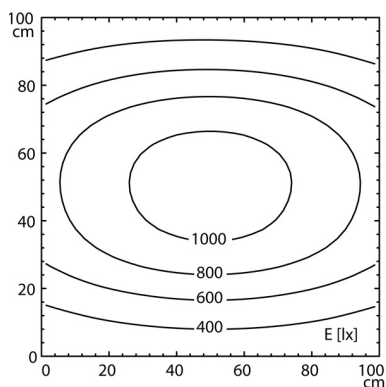
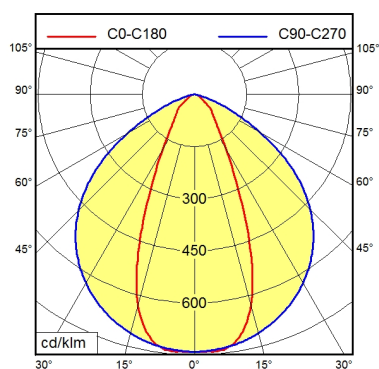


Surface-mounted luminaire MACH LED PRO MUAL 4 S

112571034-00082844

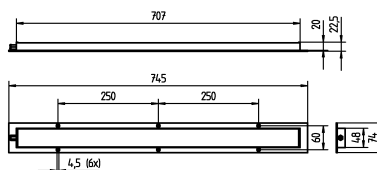

Light source
Work equipment
Connected load
Power consumption
Luminous flux
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Beam angle
Glare control
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Design
Fastening
Maximum ambient temperature
Special features

LED
Without
20 - 28 V; DC
ca. 24 W
approx. 1.640 lm
Cold white
approx. 5.000 K
CRI ≥ 80
Direct; Symmetric
30°
Without
IP 67
III
Switchable; -
External
Aluminium; Anodised; Silver metallic
Borosilicate; Clear
ca. 1,3 kg
ca. 3 m; With free stranded wires
mounted version
Screws
40 °C
Mounted version