


Serie 814

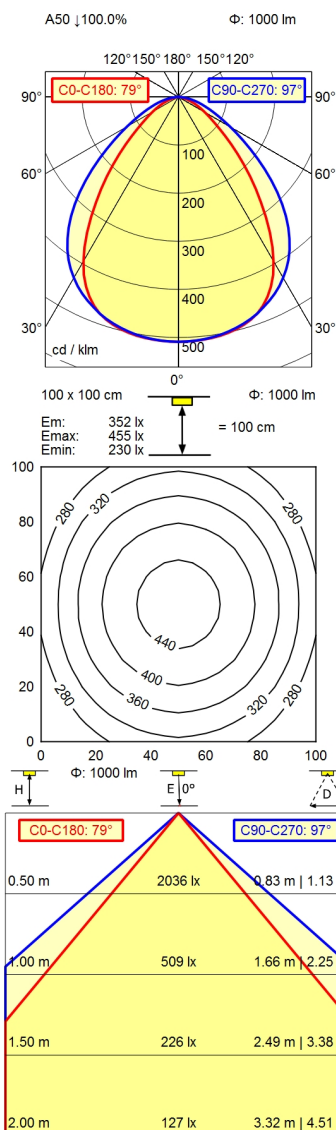

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Minimum ambient temperature

Maximum ambient temperature

Special features

LED

Electronic ballast

100 V; 120 V; 220 - 240 V; AC; 50 Hz; 60 Hz

ca. 12 W

approx. 1.000 lm

approx. 83 lm/W

Cold white

approx. 5.000 K

CRI $\geq$ 80

Direct; Symmetric

80°/100°

< 4 SDCM

$\leq$ 13.000 cd/m²

$\leq$ 22

IP 67

I

Switchable; -

External

Aluminium; Anodised; Aluminium coloured

anodised

Borosilicate; Clear

ca. 2,4 kg

Built-in plug; Connection box; Serie 814

mounted version

L-angle; Clamp

A=650 mm

-10 °C

55 °C

Eco equipment; Through-wired