




Serie\_763

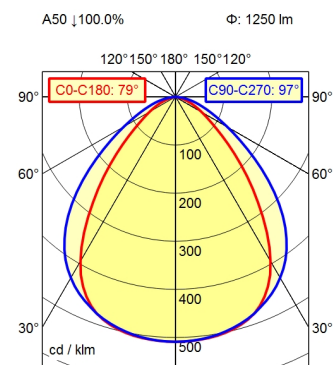

100 x 100 cm      Φ: 1250 lm

Em: 433 lx  
Emax: 554 lx  
Emin: 287 lx

100 cm

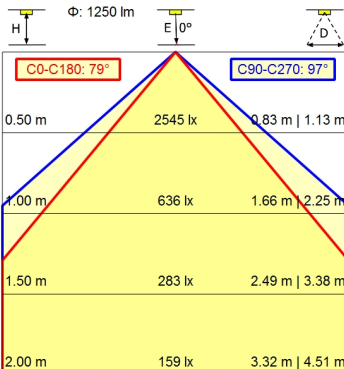

**Light source**  
**Work equipment**  
**Connected load**  
**Power consumption**  
**Luminous flux**  
**Luminous efficiency**  
**Light type/color**  
**Colour temperatur**  
**Color rendering index**  
**Light distribution**  
**Beam angle**  
**Chromaticity tolerance LED**  
**Luminance (L65)**  
**Unified glare rating (4H 8H)**  
**System of protection**  
**Class of protection**  
**Technology**  
**Operation**  
**Housing**  
**Light source cover**  
**Weight (net)**  
**Mains lead**  
**Design**  
**Fastening**  
**Dimension**  
**Minimum ambient temperature**  
**Maximum ambient temperature**  
**Special features**

LED  
Without  
18 - 30 V; DC  
ca. 13 W  
approx. 1.250 lm  
approx. 96 lm/W  
Cold white  
approx. 5.000 K  
CRI ≥ 80  
Direct; Symmetric  
80°/100°  
< 4 SDCM  
≤ 13.000 cd/m²  
≤ 22  
IP 67  
III  
Switchable; -  
External  
Aluminium; Anodised; Aluminium coloured  
anodised  
Borosilicate; Clear  
ca. 2,7 kg  
Built-in plug; Connection box; Serie\_763  
mounted version  
L-angle; Clamp  
A=790 mm  
-10 °C  
60 °C  
Eco equipment; Through-wired