



Workplace-system luminaire Tameto SAHQ 66 R



113102000-00600908



WINSTA MINI 5 pin

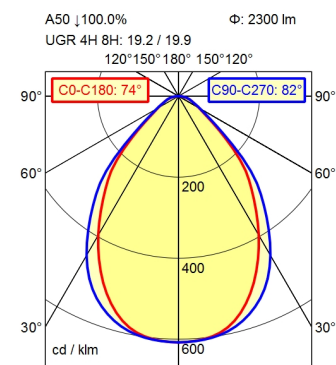

100 x 100 cm Φ : 2300 lm
Em: 863 lx
E_{max}: 1163 lx
E_{min}: 529 lx
= 100 cm

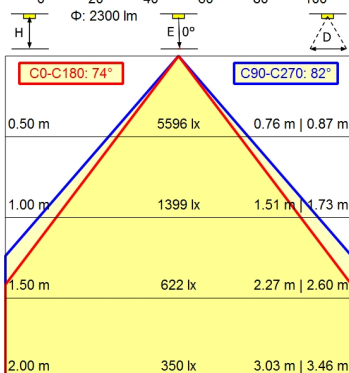

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Decorative contrast side parts

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 26 W

approx. 2.300 lm

approx. 88 lm/W

Cold white

approx. 4.000 K

CRI $\geq$ 90; R9 $\geq$ 50

Direct; Symmetric

approx. 100 %

75%

< 3 SDCM

Conical prismatic screen

$\leq$ 3.800 cd/m²

$\leq$ 22

IP 20

I

Continuously dimmable; DALI; Touch DIM

External

Aluminium/plastic; Anodised; Aluminium coloured
anodised

Structured; Plastic

ca. 4,3 kg

ca. 3 m; Built-in plug; WINSTA MINI 5 pin

mounted version

Screw down lash

Black

