Surface-mounted luminaire MACH LED PLUS.forty MLAL 27 S

113162000-00804232



RSFM5/0,06 P

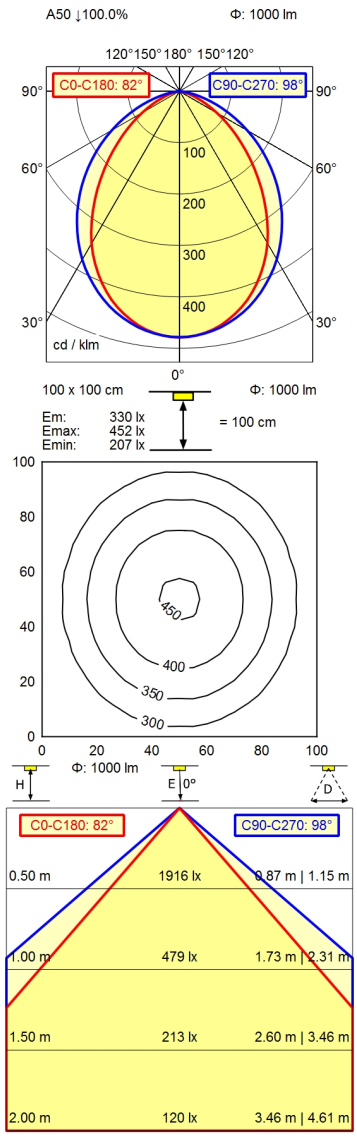

Light source	LED
Work equipment	Without
Connected load	20 - 28 V; DC
Power consumption	ca. 12 W
Luminous flux	approx. 1.000 lm
Luminous efficiency	approx. 83 lm/W
Light type/-color	adjustable light colors; Cold white; Red; Green; Blue; Yellow; Magenta; Cyan
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 80
Light distribution	Wide beam; Direct; Symmetric
Beam angle	90°
Chromaticity tolerance LED	< 4 SDCM
Glare control	Without
Luminance (L65)	≤ 43.000 cd/m²
Unified glare rating (4H 8H)	≤ 28
System of protection	IP 67
Class of protection	III
Technology	Switchable; -
Operation	External
Housing	Aluminium; Anodised; Aluminium coloured anodised
Light source cover	Borosilicate; Clear
Weight (net)	ca. 0,6 kg
Mains lead	Built-in plug; RSFM5/0,06 P
Design	mounted version
Fastening	L-angle; Clamp
Dimension	A=365 mm
Minimum ambient temperature	0 °C
Maximum ambient temperature	50 °C
Special features	7 colours controllable

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 20/08/2023 H.Waldmann GmbH & Co. KG

Surface-mounted luminaire MACH LED PLUS.forty MLAL 27 S

113162000-00804232

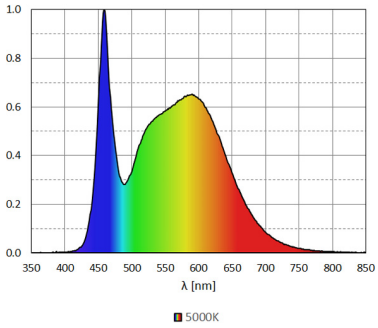

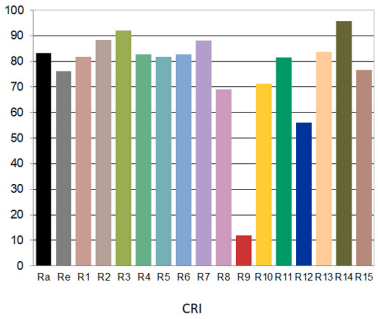

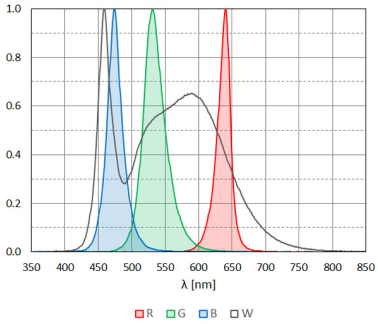

© 20/08/2023 H.Waldmann GmbH & Co. KG