

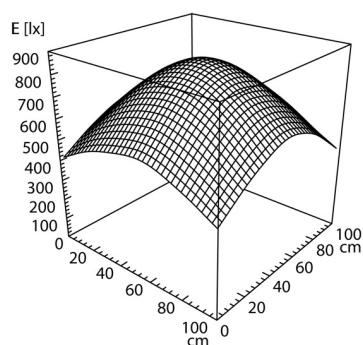


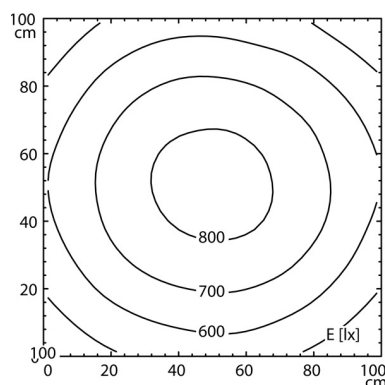

RSFPM 5/0.5 M

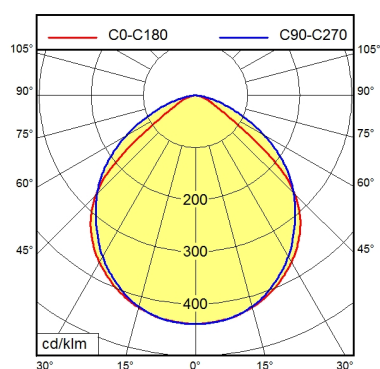

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Glare control

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Installation dimensions

Maximum ambient temperature

LED

Without

20 - 28 V; DC

ca. 21,5 W

approx. 2.140 lm

approx. 97 lm/W

Cold white

approx. 5.000 K

CRI ≥ 80

Direct; Symmetric

Without

IP 67

III

Switchable; -

External

Aluminium; Untreated; Aluminium coloured
anodised

Polycarbonate (PC); Clear

ca. 1,9 kg

Built-in plug; RSFPM 5/0.5 M

Integrated version

Screws

710 mm

ca. 711 mm; 51 mm; 21 mm

60 °C