



Surface-mounted luminaire MACH LED PLUS.forty MLAL 84 S

113527000-00805412



RSFM 4/0,05 P25-1

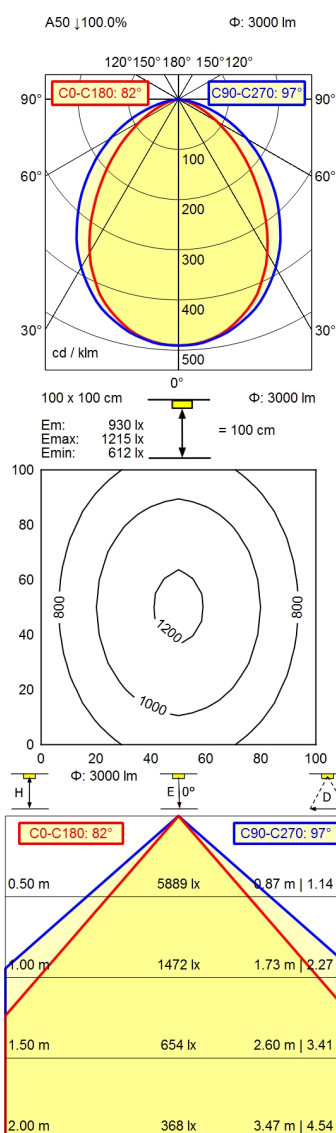

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Minimum ambient temperature

Maximum ambient temperature

Special features

LED

Without

20 - 28 V; DC

ca. 28 W

approx. 3.000 lm

approx. 107 lm/W

Cold white

approx. 5.000 K

CRI $\geq$ 80

Wide beam; Direct; Symmetric

90°

< 4 SDCM

Without

$\leq$ 43.000 cd/m²

$\leq$ 25

IP 67

III

Switchable; -

External

Aluminium; Anodised; Aluminium coloured
anodised

Borosilicate; Clear

ca. 1,5 kg

Built-in plug; RSFM 4/0,05 P25-1

mounted version

L-angle; Clamp

A=1040 mm

0 °C

60 °C

Suitable for higher ambient temperatures

