


series 272

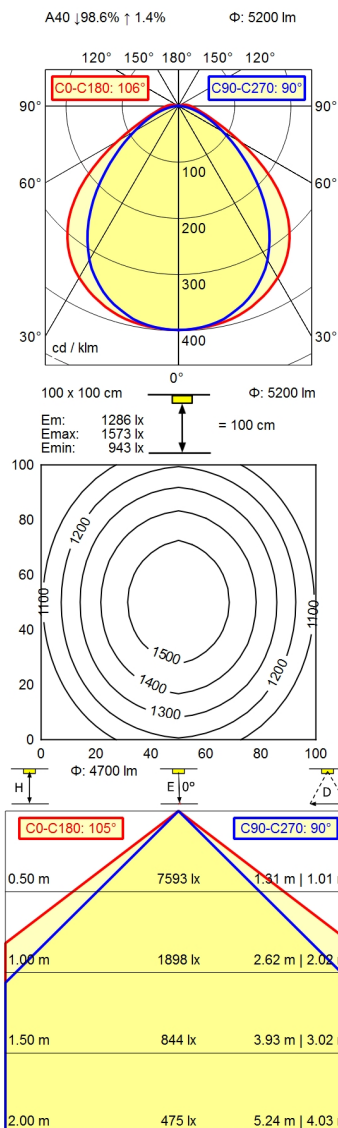

Light source
Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/color
Colour temperatur
Color rendering index
Light distribution
Direct ratio
Beam angle
Chromaticity tolerance LED
Glare control
Luminance (L65)
Unified glare rating (4H 8H)
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Fastening
Dimension
Side part
Light output
Maximum ambient temperature
Special features

LED
Without
230 V; AC; 50 Hz; 60 Hz
ca. 64 W
approx. 5.200 lm
approx. 81 lm/W
Cold white
approx. 5.000 K
CRI ≥ 80
Direct
approx. 99 %
100°
< 4 SDCM
Diffuser foil
≤ 18.000 cd/m²
≤ 25
IP 67
I
Switchable; -
External
Acrylic (PMMA), clear
Acrylic (PMMA)
ca. 3,4 kg
Connector; series 272
Pipe clamp (accessory)
A=1210 mm
A with screwed cable gland
D=1156 mm
40 °C
Light forming; Through-wired