


Surface-mounted luminaire MACH LED PLUS.forty MLAL 126 S

113693000-00801634



RSFM 4/0,05 P25-1

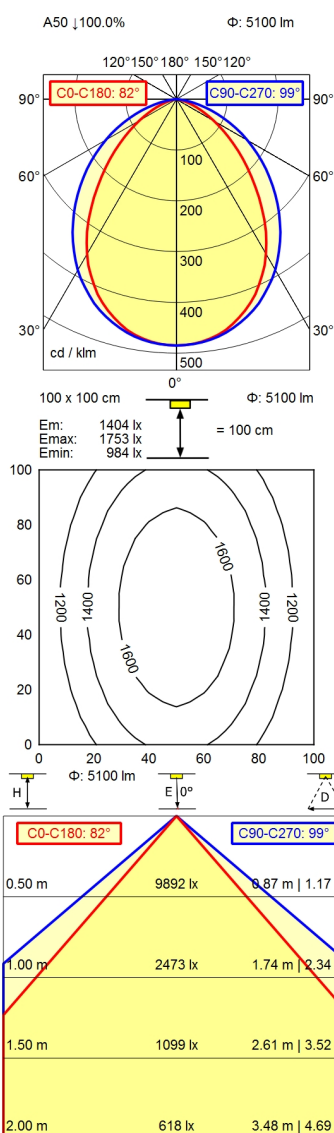

Light source
Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/color
Colour temperatur
Color rendering index
Light distribution
Beam angle
Chromaticity tolerance LED
Glare control
Luminance (L65)
Unified glare rating (4H 8H)
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Design
Fastening
Dimension
Minimum ambient temperature
Maximum ambient temperature

LED
Without
20 - 28 V; DC
ca. 50 W
approx. 5.100 lm
approx. 102 lm/W
Cold white
approx. 5.000 K
CRI ≥ 80
Wide beam; Direct; Symmetric
90°
< 4 SDCM
Without
≤ 50.000 cd/m²
≤ 28
IP 67
III
Switchable; -
External
Aluminium; Anodised; Aluminium coloured
anodised
Borosilicate; Clear
ca. 2,4 kg
Built-in plug; RSFM 4/0,05 P25-1
mounted version
L-angle; Clamp
A=1540 mm
0 °C
50 °C

