



CEE 7/XVI



BS 1363



NEMA 1-15P

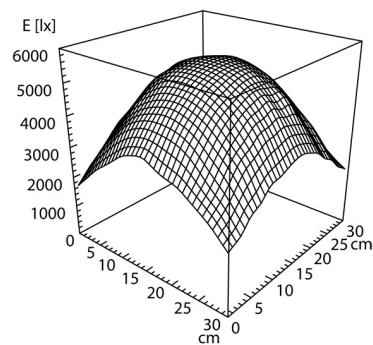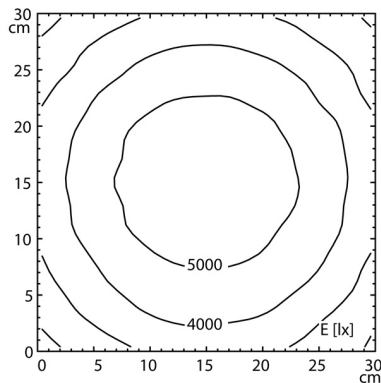

Light source

Work equipment

Connected load

Secondary tension

Power consumption

Sec. power consumption

Luminous flux

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Arm

Balance of articulation joints

Weight (net)

Mains lead

Fastening

Lens, dimensions

Lens material

Lens, diopters

Special features

LED

Electronic plug-in ballast

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 13 W

ca. 11 W

approx. 750 lm

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct

approx. 100 %

< 3 SDCM

IP 20

II with plug-in power supply, III without plug-in power supply

Multi-stage switchable; Continuously dimmable;

Touch DIM

Multi-function switch

Plastic; Untreated; Black

Polyamide; Milky

Tubular aluminium section; Anodized; Aluminium

coloured anodised

Spring

ca. 2,5 kg

ca. 3,6 m; Mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P

Screw-down flange

Ø 160 mm

Glass

3,5

Light characteristic can be adjusted with a 3-way switch