


Serie 814

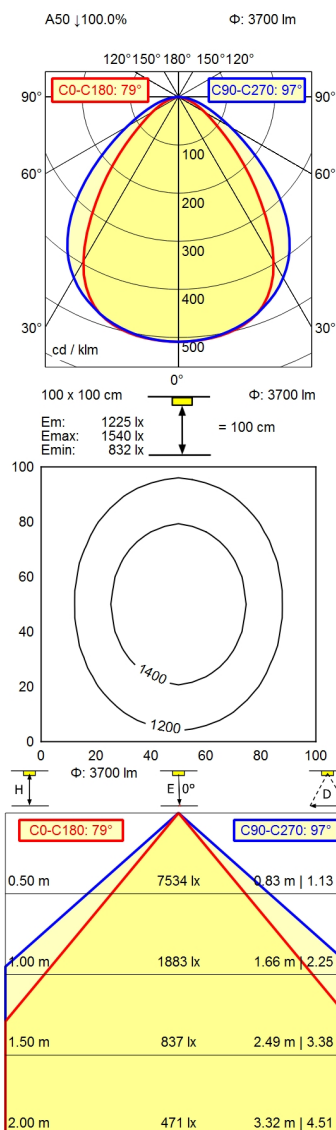

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency**

**Light type/color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Beam angle**

**Chromaticity tolerance LED**

**Luminance (L65)**

**Unified glare rating (4H 8H)**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Weight (net)**

**Mains lead**

**Design**

**Fastening**

**Dimension**

**Minimum ambient temperature**

**Maximum ambient temperature**

**Special features**

LED

Electronic ballast

120 - 277 V; AC; 50 Hz; 60 Hz

ca. 44 W

approx. 3.700 lm

approx. 84 lm/W

Cold white

approx. 5.200 K

CRI ≥ 80

Direct; Symmetric

80°/100°

< 4 SDCM

≤ 27.000 cd/m²

≤ 25

IP 67

I

Switchable; -

External

Aluminium; Anodised; Aluminium coloured

anodised

Borosilicate; Clear

ca. 3,7 kg

Built-in plug; Serie 814

mounted version

L-angle; Clamp

A=1070 mm

-10 °C

40 °C

Power equipment