
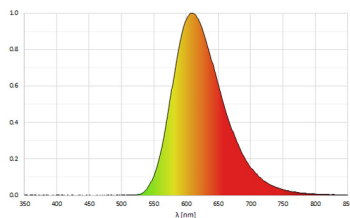


M12-A-5

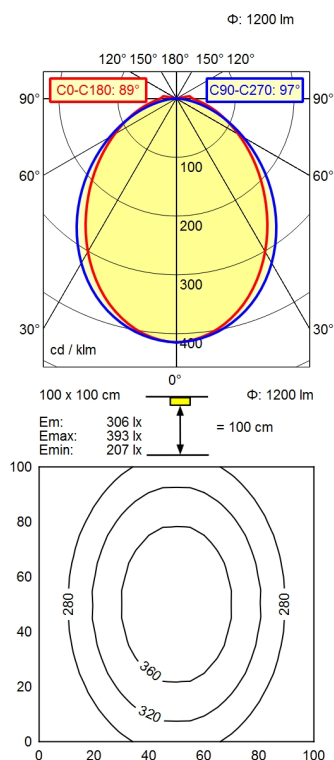

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency**

**Light type/color**

**Light distribution**

**Beam angle**

**Glare control**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Weight (net)**

**Mains lead**

**Design**

**Fastening**

**Dimension**

**Minimum ambient temperature**

**Maximum ambient temperature**

**Decorative contrast side parts**

LED

Without

22 - 26 V; DC

ca. 24 W

approx. 1.200 lm

approx. 50 lm/W

yellow; Yellow

Direct

89° / 97°

Screen

IP 54

III

Switchable; -

External

Aluminium/plastic; Anodised, painted; Aluminium  
coloured anodised  
Acrylic (PMMA); Satine

ca. 0,5 kg

Built-in plug; M12-A-5

mounted version

Bracket

A=1175mmCmin=1130mmCmax=1160mm

5 °C

40 °C

Natural silver anodised