



Surface-mounted luminaire ACURIA.perfect APA 720/850/MS



114310000-00806651



M12-A-5

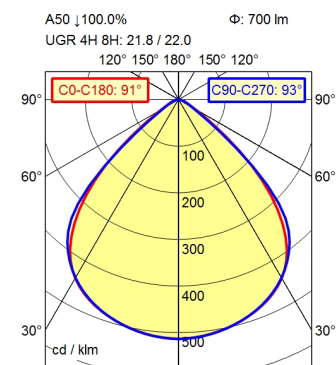

100 x 100 cm
Em: 267 lx
Emax: 347 lx
Emin: 181 lx
Φ: 700 lm
= 100 cm

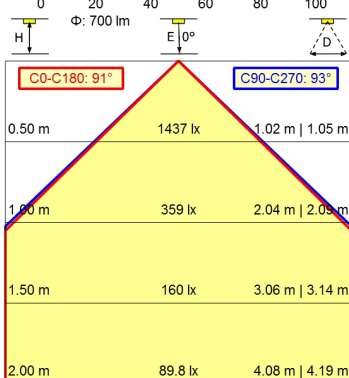

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Minimum ambient temperature

Maximum ambient temperature

Special features

LED

Without

24 V; DC

ca. 6 W

approx. 700 lm

approx. 116 lm/W

Cold white

approx. 5.000 K

CRI ≥ 80; R9 ≥ 10

Direct; Symmetric

91°

< 3 SDCM

Screen

≤ 5.200 cd/m²

≤ 22

IP 67

III

Multi-stage switchable

External

Aluminium; Anodised; Aluminium coloured
anodised
Borosilicate

ca. 0,6 kg

Built-in plug; M12-A-5

mounted version

Snap-fit

A=215 mm

0 °C

50 °C

ADVANCED package

Surface-mounted luminaire ACURIA.perfect
APA 720/850/MS
114310000-00806651

