

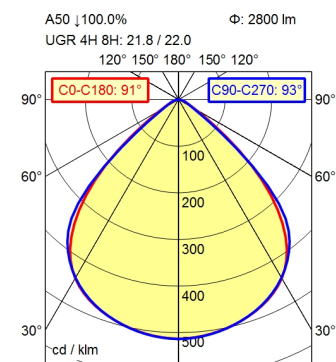


M12-A-5

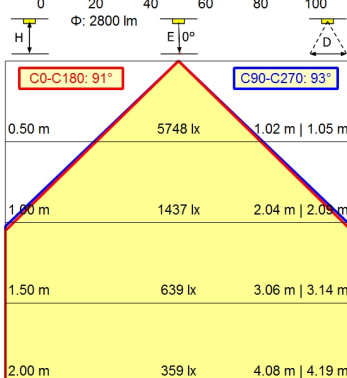

100 x 100 cm Φ: 2800 lm
Em: 1022 lx
Emax: 1298 lx
Emin: 708 lx
= 100 cm



Light source
Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/color
Colour temperatur
Color rendering index
Light distribution
Beam angle
Chromaticity tolerance LED
Glare control
Luminance (L65)
Unified glare rating (4H 8H)
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Design
Fastening
Dimension
Minimum ambient temperature
Maximum ambient temperature
Special features

LED
Without
24 V; DC
ca. 22 W
approx. 2.800 lm
approx. 127 lm/W
Cold white
approx. 5.000 K
CRI ≥ 80; R9 ≥ 10
Direct; Symmetric
91°
< 3 SDCM
Screen
≤ 5.200 cd/m²
≤ 22
IP 67
III
Multi-stage switchable
External
Aluminium; Anodised; Aluminium coloured
anodised
Borosilicate
ca. 2 kg
Built-in plug; M12-A-5
mounted version
Snap-fit
A=740 mm
0 °C
50 °C
ADVANCED package

Surface-mounted luminaire ACURIA.perfect
APA 2900/850/MS
114313000-00806649

