



Surface-mounted luminaire ACURIA.perfect APA 8000/850/MS



114317000-00806643



M12-A-5

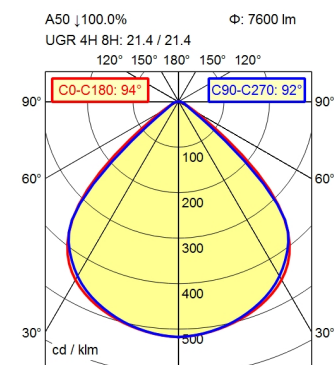

100 x 100 cm Φ : 7600 lm
Em: 2789 lx
Emax: 3532 lx
Emin: 1945 lx
= 100 cm

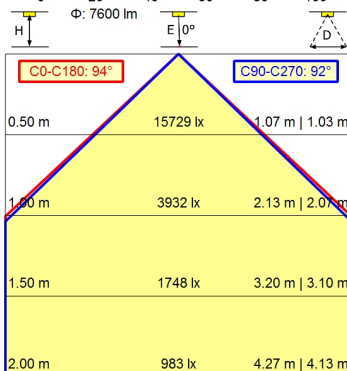

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Minimum ambient temperature

Maximum ambient temperature

Special features

LED

Without

24 V; DC

ca. 56 W

approx. 7.600 lm

approx. 135 lm/W

Cold white

approx. 5.000 K

CRI $\geq$ 80; R9 $\geq$ 10

Direct; Symmetric

92°

< 3 SDCM

Screen

$\leq$ 4.200 cd/m²

IP 67

III

Multi-stage switchable

External

Aluminium; Anodised; Aluminium coloured

anodised

Borosilicate

ca. 4,8 kg

Built-in plug; M12-A-5

mounted version

Snap-fit

A=740 mm

0 °C

50 °C

ADVANCED package

