

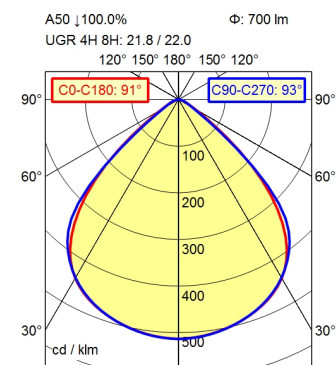


M12-A-5

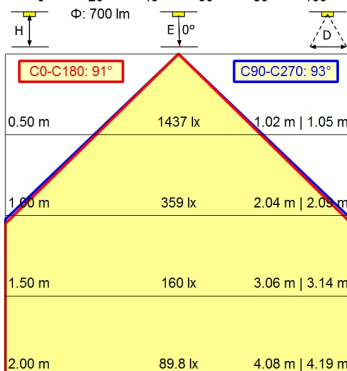

100 x 100 cm
Em: 267 lx
E_{max}: 347 lx
E_{min}: 181 lx
Φ: 700 lm
= 100 cm



Light source
Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/color
Colour temperatur
Color rendering index
Light distribution
Beam angle
Chromaticity tolerance LED
Glare control
Luminance (L65)
Unified glare rating (4H 8H)
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Design
Fastening
Dimension
Installation dimensions
Minimum ambient temperature
Maximum ambient temperature
Special features

LED
Without
24 V; DC
ca. 6 W
approx. 700 lm
approx. 116 lm/W
Cold white
approx. 5.000 K
CRI ≥ 80; R9 ≥ 10
Direct; Symmetric
91°
< 3 SDCM
Screen
≤ 5.200 cd/m²
≤ 22
IP 67
III
Multi-stage switchable
External
Aluminium; Anodised; Aluminium coloured
anodised
Borosilicate
ca. 0,5 kg
Built-in plug; M12-A-5
Integrated version
Snap-fit
A=223 mm
ca. 209 mm; 64 mm; 30 mm
0 °C
50 °C
ADVANCED package

