


M12-A-5

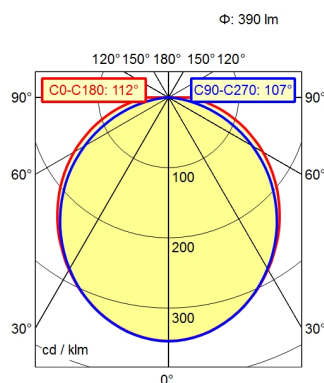

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency

Light type/color

Light distribution

Beam angle

Glare control

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Weight (net)

Mains lead

Design

Fastening

Dimension

Minimum ambient temperature

Maximum ambient temperature

Decorative contrast side parts

Special features

LED

Without

22 - 26 V; DC

ca. 16 W

approx. 390 lm

approx. 24 lm/W

adjustable light colors; Red; Green; Blue; Yellow;
Magenta; Cyan; White
Direct

112° / 107°

Screen

IP 54

III

Multi-stage switchable; -

External

Aluminium/plastic; Anodised, painted; Aluminium
coloured anodised
Acrylic (PMMA); Satine

ca. 0,2 kg

Built-in plug; M12-A-5

mounted version

Bracket

A=895mm,Cmin=850mm,Cmax=880mm

5 °C

40 °C

Natural silver anodised

7 colours controllable