


# Wall-mounted luminaire ZERA ZEW 11000/830

114487000-00813009


# Waldmann **W**

ENGINEERS OF LIGHT

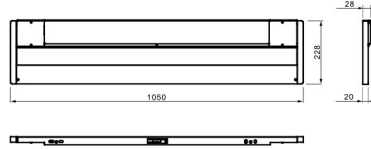

5 pin

C43 ↓46.9% ↑53.1%    Φ: 9800 lm



**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency**

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Chromaticity tolerance LED**

**Glare control**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Weight (net)**

**Mains lead**

**Design**

**Fastening**

**Maximum ambient temperature**

**Special features**

Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 122 W

approx. 10.890 lm

approx. 89 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

See luminaire type

IP 20

I

Switchable

Switch

Sectional aluminium; Anodised; Aluminium  
coloured anodised

Acrylic (PMMA); White opal

ca. 6,9 kg

Connector; 5 pin

mounted version

Wall bracket

25 °C

General light, indirect, 3000K, Ra≥80; Night light;  
indirect; 3000K; Ra≥90; Reading light, direct, 2700K,  
Ra≥90; Examination light; direct; direkt; 4000K;  
60W; Ra≥95; R9≥50; Switch right