



Wall-mounted luminaire ZERA ZEW 9000/830

114493000-00812995

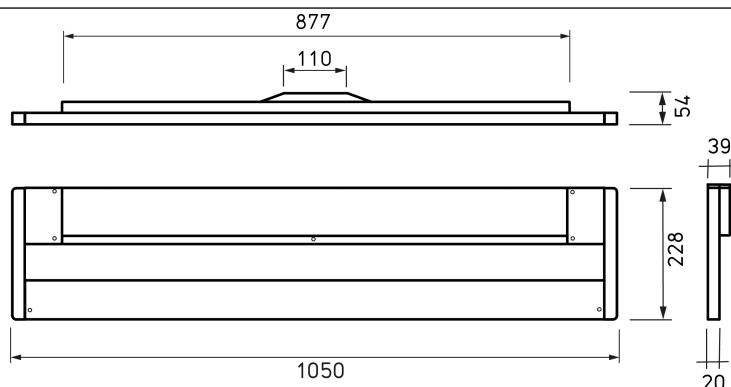

D43 ↓31.5% ↑68.5% Φ: 7600 lm



Work equipment
Connected load
Power consumption
Luminous flux
Luminous efficiency
Light type/-color
Colour temperatur
Color rendering index
Light distribution
Chromaticity tolerance LED
Glare control
System of protection
Class of protection
Technology
Operation
Housing
Light source cover
Weight (net)
Mains lead
Design
Fastening
Maximum ambient temperature
Special features

Power supply unit
220 - 240 V; AC; 50 Hz; 60 Hz
ca. 89 W
approx. 8.960 lm
approx. 100 lm/W
Warm white
approx. 3.000 K
CRI ≥ 80
Direct/indirect
< 3 SDCM
See luminaire type
IP 20
I
Switchable
Switch
Sectional aluminium; Anodised; Aluminium
coloured anodised
Acrylic (PMMA); White opal
ca. 6,9 kg
Connector; 5 pin
mounted version
Wall bracket
25 °C
General light; indirect; 3000K; Ra≥80; Night light;
indirect; 3000K; Ra≥90; Reading light; direct; 2700K;
Ra≥90; Examination light; direct; 4000K; 36W;
Ra≥95; R9≥50; Protective low voltage relay (LVC);
Switch left