


CEE 7/VII

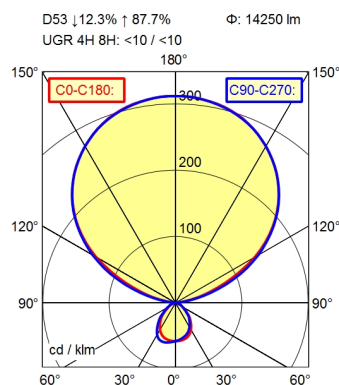

<b>light source</b>	LED
<b>work equipment</b>	electronic ballast
<b>connected load</b>	220-240V, 50/60Hz
<b>power consumption</b>	env. 200 W
<b>power factor</b>	env. 0,966
<b>luminous flux</b>	approx. 28.500 lm
<b>luminous efficiency</b>	approx. 142 lm/W
<b>light type/-color</b>	direct static white; indirectly dynamic white
<b>colour temperatur</b>	approx. 4.000 K; 3.000 - 6.500 K
<b>color rendering index</b>	CRI > 80
<b>light distribution</b>	direct/indirect
<b>direct ratio</b>	approx. 12 %
<b>glare control</b>	conical prismatic screen
<b>luminance (L65)</b>	<= 3000 cd/m <sup>2</sup>
<b>unified glare rating (4H 8H)</b>	<= 10
<b>system of protection</b>	IP 20
<b>class of protection</b>	I
<b>technology</b>	presence and daylight sensor control (PIR); DALI
<b>operation</b>	multi-function switch; Touch-LED
<b>housing</b>	steel/plastic; painted; silver metallic
<b>cover</b>	Acrylic (PMMA); satine
<b>arm</b>	silver metallic
<b>luminaire base</b>	rectangular flat
<b>weight (net)</b>	ca. 27,0 kg
<b>mains lead</b>	ca. 3,00 m; mains plug; CEE 7/VII
<b>fastening</b>	floor standing base
<b>minimum ambient temperature</b>	25 °C
<b>maximum ambient temperature</b>	25 °C
<b>decorative contrast side parts</b>	metallic silver
<b>life expectancy LED</b>	L80B50 60.000h
<b>special features</b>	integrated light and presence sensor PIR; separated, direct and indirect light individually adjustable; retrofittable with TALK module; Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; integrated light management for biodynamic light VTL; luminaire head detachable