


CEE 7/VII

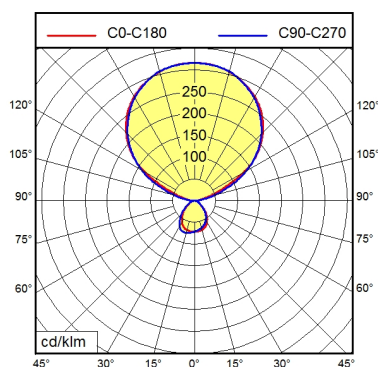

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Power factor**

**Luminous flux**

**Light type/color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Direct ratio**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**Unified glare rating (4H 8H)**

**System of protection**

**Class of protection**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Arm**

**Weight (net)**

**Mains lead**

**Fastening**

**Minimum ambient temperature**

**Maximum ambient temperature**

**Decorative contrast side parts**

**Life expectancy LED**

**Special features**

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 77 W

env. 0,93

approx. 11.650 lm

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 15 %

< 3 SDCM

Conical prismatic screen

≤ 3.000 cd/m<sup>2</sup>

≤ 16

IP 20

I

Presence and daylight sensor control (PIR); DALI

Multi-function switch

Steel/plastic; Painted; White

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; White

ca. 9,5 kg

ca. 3,7 m; Mains plug; CEE 7/VII

Socket; Table adaptor

25 °C

25 °C

Flint grey

L80B50 60.000h

Integrated light and presence sensor PIR;  
Separated, direct and indirect light individually  
adjustable; Retrofittable with TALK module; Flicker-  
free; Inclination of tubular section adjustable;  
Cradle to Cradle Certified TM; Direct light  
component with edge light and light-guide  
technology for homogenous light exit; Luminaire  
head detachable