


CEE 7/VII

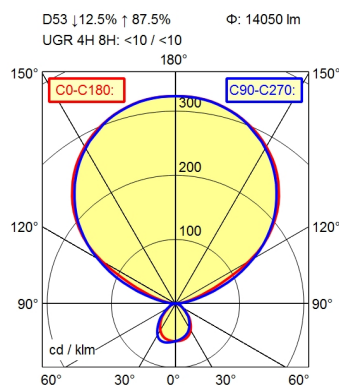

Light source

Work equipment

Connected load

Power consumption

Power factor

Luminous flux

Luminous efficiency

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Direct ratio

Chromaticity tolerance LED

Glare control

Luminance (L65)

Unified glare rating (4H 8H)

System of protection

Class of protection

Technology

Operation

Housing

Light source cover

Arm

Weight (net)

Mains lead

Fastening

Minimum ambient temperature

Maximum ambient temperature

Decorative contrast side parts

Life expectancy LED

Special features

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 93 W

env. 0,943

approx. 14.050 lm

approx. 151 lm/W

Cold white

approx. 4.000 K

CRI ≥ 80

Direct/indirect

approx. 12 %

< 3 SDCM

Conical prismatic screen

≤ 3.000 cd/m²

≤ 16

IP 20

I

Presence and daylight sensor control (PIR); DALI

Multi-function switch

Steel/plastic; Painted; White

Acrylic (PMMA); Satine

Steel tube; Painted; Tubular section upright; White

ca. 9,5 kg

ca. 3,7 m; Mains plug; CEE 7/VII

Socket; Table adaptor

25 °C

25 °C

Flint grey

L80B50 60.000h

Integrated light and presence sensor PIR;
Separated, direct and indirect light individually
adjustable; Retrofittable with TALK module; Flicker-
free; Inclination of tubular section adjustable;
Cradle to Cradle Certified TM; Direct light
component with edge light and light-guide
technology for homogenous light exit; Luminaire
head detachable