
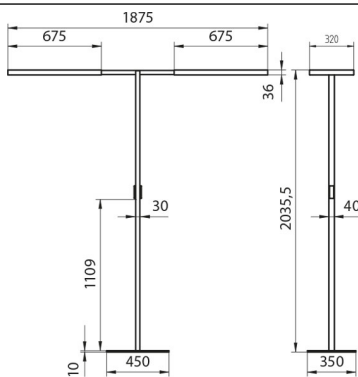



Free-standing luminaire LAVIGO DPS 30000/840/R/G2A

121842000-00808552



CEE 7/VII

D53 | 11.5% | 88.5% | Φ : 15250 lm
UGR 4H 8H: <10 / <10



light source	LED
work equipment	electronic ballast
connected load	220-240V, 50/60Hz
power consumption	env. 210 W
power factor	env. 0,966
luminous flux	approx. 30.500 lm
luminous efficiency	approx. 145 lm/W
light type/-color	cold white
colour temperatur	approx. 4.000 K
color rendering index	CRI > 80
light distribution	direct/indirect
direct ratio	approx. 12 %
chromaticity tolerance LED	< 3 SDCM
glare control	conical prismatic screen
luminance (L65)	<= 3000 cd/m ²
unified glare rating (4H 8H)	<= 10
system of protection	IP 20
class of protection	I
technology	presence and daylight sensor control (PIR); DALI
operation	multi-function switch; Touch-LED
housing	steel/plastic; painted; white
cover	Acrylic (PMMA); satine
arm	steel tube; painted; tubular section upright; weiß
luminaire base	rectangular flat
weight (net)	ca. 27,0 kg
mains lead	ca. 3,00 m; mains plug; CEE 7/VII
fastening	floor standing base
minimum ambient temperature	25 °C
maximum ambient temperature	25 °C
decorative contrast side parts	flint grey
life expectancy LED	L80B50 60.000h
special features	integrated light and presence sensor PIR; asymmetric radiation; separated, direct and indirect light individually adjustable; retrofittable with TALK module; Flicker-free; Direct light component with edge light and light-guide technology for homogenous light exit; luminaire head detachable