



Free-standing luminaire LAVIGO DPS 30000/840/R/G2A

121842000-00808553

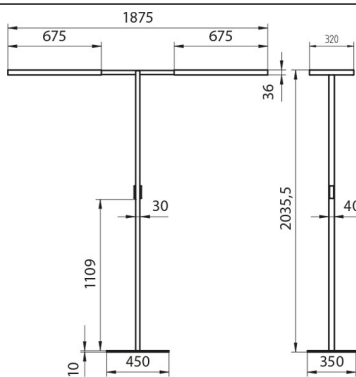

D53 | 11.5% | 88.5% | Φ : 15250 lm
UGR 4H 8H: <10 / <10



light source
work equipment
connected load
power consumption
power factor
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
direct ratio
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
arm
luminaire base
weight (net)
mains lead
fastening
minimum ambient temperature
maximum ambient temperature
decorative contrast side parts
life expectancy LED
special features

LED
electronic ballast
220-240V, 50/60Hz
env. 210 W
env. 0,966
approx. 30.500 lm
approx. 145 lm/W
cold white
approx. 4.000 K
CRI > 80
direct/indirect
approx. 12 %
< 3 SDCM
conical prismatic screen
<= 3000 cd/m²
<= 10
IP 20
I
presence and daylight sensor control (PIR); DALI
multi-function switch; Touch-LED
steel/plastic; painted; silver metallic
Acrylic (PMMA); satine
steel tube; painted; tubular section upright; silver
metallic
rectangular flat
ca. 27,0 kg
ca. 3,00 m; mains plug; CEE 7/VII
floor standing base
25 °C
25 °C
metallic silver
L80B50 60.000h
integrated light and presence sensor PIR;
asymmetric radiation; separated, direct and
indirect light individually adjustable; retrofittable
with TALK module; Flicker-free; Direct light
component with edge light and light-guide
technology for homogenous light exit; luminaire
head detachable