

8226218

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Alice


Rectangular luminaire for installation in the wall - recessed. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: sandblasted. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: I, LED module: I, III Installation: wiring through two M16 plastic cable glands (4,5<ø<10mm) placed on the back side of the fitting. Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. Installation requires a dedicated box to be ordered separately.

IP65   

Available Colors for this Version



Alice Power LED / Vertical Frame

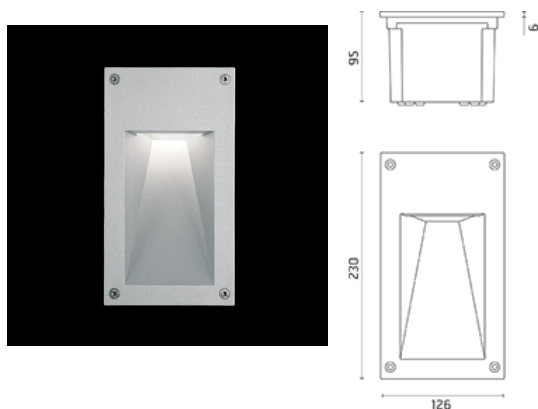

Warnings

Wall Recessed



Recessed wall fitting



Remote device required



The fitting is equipped with 2 cable input.



Protection against impact. IK 08 - 05,00 joule

Light Flux, Placement



Product Code Details

8226218

Light Source



WARM WHITE 3000K POWER LEDs 3,3W/24Vdc

Total power 4,5W

LED lm 321 ÷ OUTPUT lm 73

CRI >80

Remote electronic power supply to be ordered





Code: 77
Box for installation
236 x 136 H 103 mm



Code: 150
Power supply dual function
Vout 24Vdc: 8W/100÷240V
Iout 350mA: 6X1W/100÷240V
IP20 CLASS II SELV EQ.



Code: 106
Power supply dual function
Vout 24Vdc: 8W/100÷240V
Iout 350mA: 6X1W/100÷240V - IP65 CLASS II SELV EQ.



Code: 87
Power supply
10W/110÷240V - 24Vdc
IP20 CLASS II SELV.



Code: 175
Power supply
10W/110÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 144
Power supply
17W/110÷240V - 24Vdc
(15W@110V) IP20 CLASS II SELV.



Code: 147
Power supply
20W/220÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 110
Power supply
70W/220÷240V - 24Vdc
IP67 CLASS II SELV EQ.



Code: 155
Power supply
50W/120÷240V - 24Vdc
IP67 CLASS II SELV.



Code: 156
Power supply
100W /120÷240V - 24Vdc
IP67 CLASS II SELV.